

**Randy Lee, P.E.**  
Executive Manager of Operations / Assistant GM

**Peter Kavounas, P.E.**  
General Manager

May 15, 2019

Regional Water Quality Control Board, Santa Ana Region

**Attention: Ms. Hope Smythe**

3737 Main Street, Suite 500  
Riverside, California 92501-3348

**Subject: Chino Basin Recycled Water Groundwater Recharge Program:  
Quarterly Monitoring Report for January through March 2019**

Dear Ms. Smythe,


Inland Empire Utilities Agency and Chino Basin Watermaster hereby submit the *Quarterly Monitoring Report* for the first quarter of 2019 (1Q19), January 1 through March 31, 2019, for the *Chino Basin Recycled Water Groundwater Recharge Program*. This document is submitted pursuant to requirements in Order No. R8-2007-0039. All required monitoring and reporting for the quarter are presented in the attached report. During 1Q19, the Groundwater Recharge Program was in compliance with all monitoring and reporting requirements as specified in the Order, with the exception of an exceedance of the 4-quarter running average for odor (secondary MCL).

Chino Basin Watermaster hereby certifies that, during the period of January 1 through March 31, 2019, there was no reported pumping for drinking water purposes in the buffer zones extending 500 feet laterally and 6 months underground travel time from each of the recharge sites using recycled water, namely 8th Street, Banana, Brooks, Decluz, Ely, Hickory, RP3, San Sevaine, Turner, and Victoria Basins. In point of fact, there are no domestic or municipal production wells in the buffer zones of the aforementioned recharge sites.

#### **DECLARATION**


*I certify under penalty of law that I have personally examined and am familiar with the information submitted in this document and all attachments thereto; and that, based on my inquiry of the individuals immediately responsible for obtaining the information, I believe that the information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment.*

Executed on the 15<sup>th</sup> day of April in the Cities of Chino and Rancho Cucamonga.

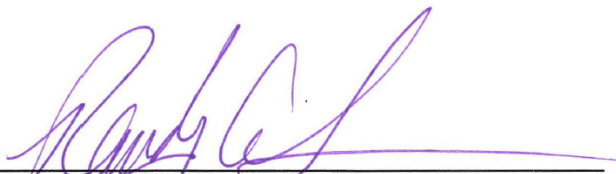

---

Randy Lee, P.E.  
Executive Manager of Operations/  
Assistant General Manager




---

Peter Kavounas, P.E.  
General Manager

# Chino Basin Recycled Water Groundwater Recharge Program

## Quarterly Monitoring Report January 1 through March 31, 2019

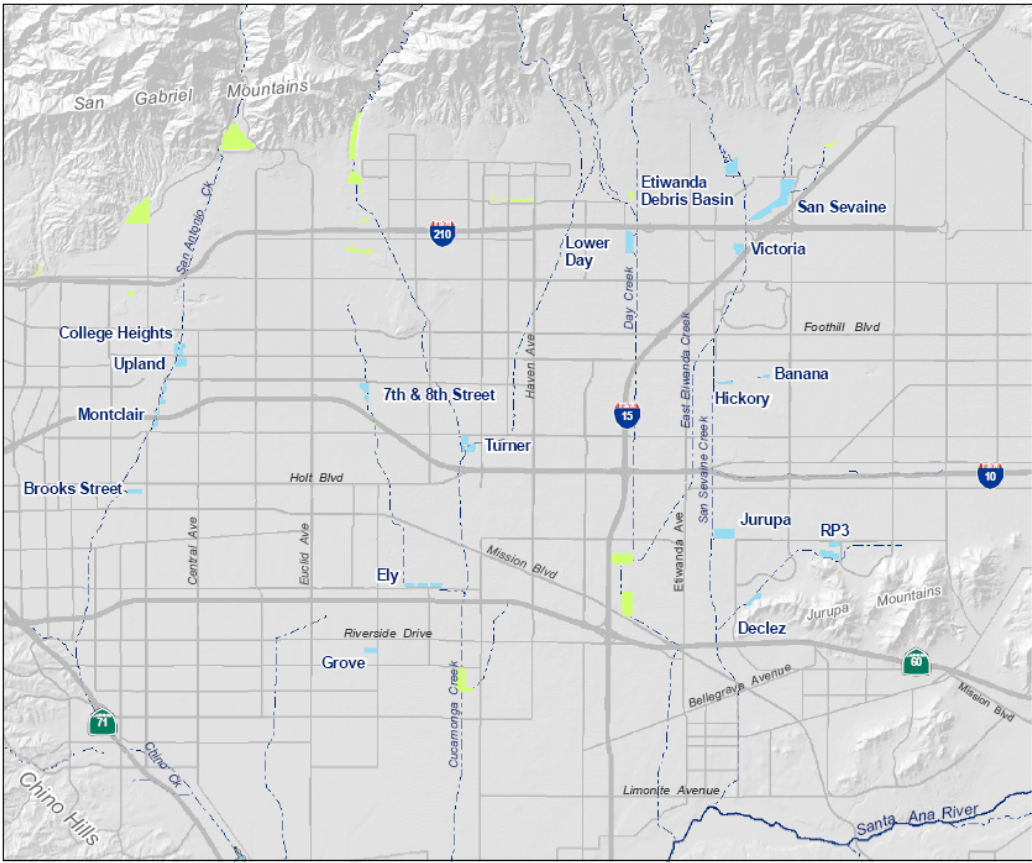

*Prepared by:*



May 15, 2019

## Table of Contents

<b>1. Introduction .....</b>	<b>1</b>
<i>A. Order No. R8-2007-0039 .....</i>	<i>1</i>
<i>B. Order No. R8-2009-0057 .....</i>	<i>1</i>
<i>C. Revised Monitoring &amp; Reporting Program No. R8-2007-0039 .....</i>	<i>1</i>
<i>D. Title 22, Division 4, Chapter 3. Article 5.1 §60320.100.....</i>	<i>2</i>
<i>E. Outline of the Quarterly Report .....</i>	<i>2</i>
<b>2. Monitoring Results.....</b>	<b>2</b>
<i>A. Recycled Water: RP-1 and RP-4 .....</i>	<i>2</i>
<i>B. Recycled Water: Basin and Lysimeter Samples.....</i>	<i>3</i>
<i>C. Recycled Water: Alternative Monitoring Plans for TOC and TN.....</i>	<i>4</i>
<i>D. Diluent Water.....</i>	<i>5</i>
<i>E. Groundwater Monitoring Wells.....</i>	<i>5</i>
<b>3. Recharge Operations .....</b>	<b>6</b>
<b>4. Operational Problems &amp; Preventive or Corrective Actions .....</b>	<b>6</b>
<b>5. Certification of Non-Pumping in the Buffer Zones.....</b>	<b>6</b>
<b>6. MVWD ASR Project .....</b>	<b>7</b>

### LIST OF TABLES

2-1a 2-1b 2-1c	Recycled Water Monitoring: RP-1 & RP-4 Effluent Water Quality (Recycled Water Quality Specifications A.5, A.7, A.8, & A.9)
2-2	Recycled Water Monitoring: Agency-Wide Flow-Weighted TIN & TDS (Recycled Water Quality Specifications A.6)
2-3	Recycled Water Monitoring: Recycled Water Quality Specifications A.1, A.2, A.3, & A.15
2-4	Recycled Water Monitoring: Remaining Priority Pollutants, EDCs & Pharmaceuticals, and Unregulated Chemicals (Monitoring & Reporting Program)
2-5a	Lysimeter and Surface Water Monitoring: TOC, Nitrogen Species, and EC
2-5b	Alternative Monitoring Plans
2-6	RWC, TOC Average, and TN Compliance Summary
2-7	Diluent Water Monitoring: Stormwater
2-8	Summary of Wells in Groundwater Monitoring Networks
2-9	Groundwater Monitoring Well Results (Quarterly)
3-1	Diluent & Recycled Water Recharge Volumes
6-1	MVWD ASR Project - TIN/TDS Mass Balance

### LIST OF FIGURES

1-1	Basin Locations
2-1	Monitoring Well Network: Hickory and Banana Basins
2-2	Monitoring Well Network: Turner Basins
2-3	Monitoring Well Network: 7th & 8th Street Basins
2-4	Monitoring Well Network: Ely Basins
2-5	Monitoring Well Network: Brooks Basin
2-6	Monitoring Well Network: RP3 Basins & Declez Basin
2-7	Monitoring Well Network: San Sevaine & Victoria Basins

## 1. Introduction

Inland Empire Utilities Agency (IEUA), Chino Basin Watermaster (Watermaster), Chino Basin Water Conservation District, and San Bernardino County Flood Control District are partners in the implementation of the Chino Basin Recycled Water Groundwater Recharge Program. This is part of a comprehensive water supply program to enhance water supply reliability and improve the groundwater quality in local drinking water wells throughout the Chino Groundwater Basin by increasing the recharge of stormwater, imported water and recycled water. This program is an integral part of Watermaster's Optimum Basin Management Plan (OBMP).

### A. Order No. R8-2007-0039

On June 29, 2007, the Santa Ana Regional Water Quality Control Board (Regional Board) adopted Order No. R8-2007-0039 (Order) which prescribes the requirements for recycled water use for groundwater recharge in 13 recharge sites within the Chino-North Groundwater Management Zone. The locations of recharge basins in the Chino Basin Groundwater Recharge Program are shown in Figure 1-1.

As a provision of this Order, IEUA and Watermaster must also comply with Monitoring and Reporting Program No. R8-2007-0039 (MRP). The MRP includes the water quality monitoring requirements of the Chino Basin Recycled Water Groundwater Recharge Program and the requirement for the submittal of quarterly and annual reports. This document is the quarterly report for the first quarter of 2019 (1Q19).

The quarterly report includes the following elements as prescribed in the MRP:

- Monitoring results for recycled water (including lysimeter monitoring), diluent water, and groundwater.
- Recycled water and diluent water volumes recharged at each basin.
- Reporting of any non-compliance events due to water quality, including records of any operational problems, plant upset and equipment breakdowns or malfunctions, and any diversion(s) of off-specification recycled water and the location(s) of final disposal. All corrective or preventive action(s) taken.
- Certification that no groundwater has been pumped for domestic water supply use from the buffer zone that extends 500 feet and 6-months underground travel time from the recharge basin(s) where recycled water is applied.

### B. Order No. R8-2009-0057

On October 23, 2009, the Regional Board adopted Order No. R8-2009-0057, which amended the recharge permit (Order No. R8-2007-0039) by extending the previously 60-month averaging period to 120 months for determining a recharge site's recycled water contribution (RWC). The Order No. R8-2009-0057 also allowed a fraction of the groundwater underflow of the Chino Basin aquifers to be used as a source of diluent water when calculating the running average RWC.

### C. Revised Monitoring & Reporting Program No. R8-2007-0039

On October 27, 2010, the Regional Board revised Monitoring and Reporting Program No. R8-2007-0039 (MRP) based on requests for modifications from IEUA and approved by the State Water Resources Control Board – Division of Drinking Water (DDW, formerly California Department of Public Health). The following changes were made to the MRP:

- 1) Sampling Requirements A.3, A.4, and A.5 were modified by specifying that samples shall be collected on a representative day instead of the 10<sup>th</sup> day.

- 2) Groundwater Monitoring Program Requirement V.1. was modified by adding a sentence to the paragraph that allows IEUA to analyze the groundwater samples collected on a quarterly basis from non-active municipal drinking water wells for dissolved metals, instead of total recoverable metals.
- 3) Reporting Requirement VI.B.3.b. was modified and footnote No. 18 was added to reflect that IEUA uses groundwater monitoring information contained in the *State of the Basin* report prepared on a biennial basis by the Chino Basin Watermaster, amongst other sources, for the annual determination of the recycled water groundwater flow path.

#### **D. Title 22, Division 4, Chapter 3. Article 5.1 §60320.100**

On June 18, 2014, the DDW adopted new regulations pertaining to Groundwater Replenishment Reuse Projects (GRRP), which can be found in Title 22 California Code of Regulations, Division 4, Chapter 3. Article 5.1 “Indirect Potable Reuse: Groundwater Replenishment - Surface Application” found in Sections §60320.100 through 60320.130. Pursuant to the new GRRP regulations, additional monitoring and reporting began in 3Q15.

#### **E. Outline of the Quarterly Report**

Section 2 of this quarterly report discusses the water quality monitoring results for recycled water recharge (water recycling plant effluent, distribution system, basin surface water, and lysimeter data), diluent water, and groundwater. Section 3 provides an overview of recharge operations including the volume of diluent water and recycled water recharged. Section 4 describes any operational problems and preventive and/or corrective actions taken. Section 5 contains the certification of non-pumping in the 500-foot buffer zones around each basin. Section 6 is a brief overview of the Monte Vista Water District’s (MVWD) Aquifer Storage and Recovery (ASR) project.

## **2. Monitoring Results**

### **A. Recycled Water: RP-1 and RP-4**

The requirements for recycled water monitoring are described in the MRP. Tables 2-1 through 2-4 include all of the requisite 1Q19 data.

Recycled Water Specifications A.5 through A.9 in the Order are the narrative limits established in the permit. The corresponding monitoring data used to determine compliance with the Order are presented in Tables 2-1 and 2-2. This data is typically collected from samples of RP-1 and RP-4 effluent; however, recycled water compliance with the total nitrogen (TN) limit of 5 mg/L (Specification A.7) can also be met at the lysimeters (Table 2-5a) or at locations specified in alternative monitoring plans (Table 2-5b, and discussed in further detail in Section 2.B). During 1Q19, there were no exceedances of the TN limit.

Recycled Water Specifications A.1 through A.4 of the Order are numerical limits based on the Federal and State primary maximum contaminant levels (MCLs), secondary MCLs, and Action Levels. Recycled Water Specification A.15 is a numerical limit for oil and grease. The corresponding monitoring data used to determine compliance with these specifications in the Order are presented in Table 2-3. Due to the volume of samples required for laboratory analyses, IEUA selected, and DDW approved, a sampling point along the recycled water distribution pipeline as the compliance point for the numerical limits. IEUA selected the turnout to NRG California South, LP (formerly Reliant Energy) as representative of the system blend of recycled water used for recharge.

In the Order, compliance for all constituents with MCLs or Action Levels is based on a 4-quarter running average (Recycled Water Specifications A.1 through A.4). Table 2-3 summarizes the 4-quarter running



---

average concentration data for each parameter from 2Q18 through 1Q19 and lists the corresponding limits for compliance.

There were no exceedances for the parameters analyzed during 1Q19, this includes the following categories: primary MCLs for inorganic chemicals, volatile organic compounds (VOCs), non-volatile synthetic organic chemicals (SOCs), radionuclides, and disinfection byproducts; action levels for lead and copper; secondary MCLs for required constituents, with the exception of odor; and oil and grease.

Odor has a secondary MCL of 3 Units in Recycled Water Specification A.3. The 4-quarter running average for 1Q19 was 15 Units, causing the threshold odor compliance metric to exceed the secondary MCL. The odor has been identified by Eurofins Eaton Analytical (contract laboratory) as chlorine. Recycled water used for groundwater recharge must meet disinfected tertiary recycled water standards in accordance to Title 22. Sodium hypochlorite is used as the disinfection agent at the RP-1 and RP-4 water recycling facilities; hence, the smell of chlorine is prominent in recycled water and is therefore unavoidable. Order No. R8-2007-0039 allows compliance for secondary MCLs to be determined at the mound monitoring well. Based on the mound monitoring well data (Table 2-9a), threshold odor did not exceed 3 Units at the nearest downgradient monitoring wells during 1Q19.

Although NRG turnout is a suitable sampling location for most constituents, it is not appropriate for Total Trihalomethanes (TTHMs), Total Haloacetic Acids (HAA5), and 1,2,3-Trichloropropane (1,2,3-TCP). Compliance samples for these compounds are taken from lysimeters or monitoring wells at basins actively receiving recycled water. At these locations, the samples better represent the compounds present in the recycled water prior to reaching the groundwater table, as the concentrations of these constituents change through the recharge process. Once a quarter, a representative sample is collected from a selected compliance lysimeter/monitoring well and analyzed for these compounds. For the 1Q19 sampling for these three compounds, IEUA chose the 25-foot below ground surface lysimeter at the Brooks Basin (BRK-LYS-25) as the compliance point. The Brooks Basin lysimeter was selected as the compliance point because the basin received consistent recycled water recharge and recycled water was present at the 25-foot depth based on electrical conductivity (EC) measurements.

Table 2-4 summarizes the quarterly monitoring results of recycled water for constituents with no MCLs or Action Levels; this includes priority pollutants, chemicals of emerging concern (CECs), and chemicals with state notification levels. All required constituents were analyzed in 1Q19.

Note that in Table 2-4 there is an updated section named “Health-based and performance indicator CECs for Surface Application”, which includes CECs listed as monitoring requirements in the State Water Resources Control Board’s (State Water Board) amendment to the Policy for Water Quality Control for Recycled Water (Recycled Water Policy) adopted on December 11, 2018, and effective as of April 8, 2019. The amendment included updates to the CECs monitoring list based on the 2018 Science Advisory Panel recommendations. Additionally, the DDW issued notification levels (NLs) for two of the CECs on July 13, 2018; perfluorooctanesulfonic acid (PFOS) and perfluorooctanoic acid (PFOA). The monitoring for PFOS and PFOA in recycled water began in 4Q18.

## **B. Recycled Water: Basin and Lysimeter Samples**

Total organic carbon (TOC) and nitrogen species sampling and analyses are performed weekly or monthly at lysimeters at some basins when recycled water is being delivered, for the determination of compliance with Recycled Water Specifications A.7 and A.9 of the Order. EC is also measured and reported to assist in identifying the presence of recycled water at various depths in the vadose zone. Basin and lysimeter water quality results from 1Q19 are summarized in Table 2-5a. The table includes surface water and lysimeter data at the 25-foot depth for Brooks and Declez Basin. Most compliance sampling for TOC and TN of the recycled water at each basin is analyzed using alternative monitoring plans (Section 2.C), and not lysimeter data. Currently, the only lysimeter monitoring data used to assess

---

compliance is at Brooks (TN only) and Declez Basins. There were no exceedances of TN and TOC at Brooks and Declez Basins during 1Q19.

### **C. Recycled Water: Alternative Monitoring Plans for TOC and TN**

As indicated in Recycled Water Compliance Determination B.5 and B.6 of the Order, alternative monitoring plans to the lysimeter-based compliance sampling for TOC and TN under Recycled Water Specifications A.7 and A.9 can be established upon development of a soil-aquifer treatment factor using recharge demonstration studies. The alternative monitoring plans can be determined in the basin Start-up Period Reports or First Year Operations Reports. The alternative TOC and TN monitoring plans approved by the Regional Board and DDW include alternative monitoring locations that include: sampling at a recycled water distribution turnout with the application of a correction factor; monitoring at one basin lysimeter; and/or monitoring at a basin monitoring well. The following are the alternative monitoring plans for each basin:

- Banana Basin: Sampling at the NRG turnout with a correction factor of 80 percent for TOC and 37 percent for TN (added to Table 2-5b in 2Q18 because alternative monitoring plan was located in the First Year Operations Report for Banana Basin prepared by WEI & IEUA in September 2007)
- Hickory Basin: Sampling at the NRG turnout with a correction factor of 81 percent for TOC and 27 percent for TN (added to Table 2-5b in 2Q18 because alternative monitoring plan was located in the First Year Operations Report for Hickory Basins prepared by WEI & IEUA in October 2007)
- Turner Basins 1 & 2: Sampling at the NRG turnout with a correction factor of 70 percent for TOC and 87 percent for TN
- Turner Basins 3 & 4: Sampling at the NRG turnout with a correction factor of 85 percent for TOC and 87 percent for TN
- Ely Basins: Sampling RP-1 recycled water with a correction factor of 76 percent for TOC and 52 percent for TN
- RP3 Basin: Sampling at the NRG turnout with a correction factor of 88 percent for TOC and 31 percent for TN
- 8<sup>th</sup> Street Basin: Sampling at the NRG turnout with a correction factor of 88 percent for TOC and 75 percent for TN
- San Sevaine 5 Basin: Sampling at the NRG turnout with a correction factor of 78 percent for TOC and 69 percent for TN (removed from Table 2-5b in 2Q18 because this site has not received recycled water since 2014)
- Victoria Basin: Sampling at the NRG turnout with a correction factor of 78 percent for TOC and 82 percent for TN
- Brooks Basin: Sampling at the 25-foot lysimeter is the compliance point for TN, and sampling at well BRK-1/1 is the compliance point for TOC

The TOC and TN values calculated based on the alternative monitoring locations and the application of these correction factors listed above are summarized in Table 2-5b. Table 2-6 is a compliance summary table for RWC, TOC average, and TN compliance. It includes the following: when the basin started receiving recycled water, when the startup period was completed, the RWC limit, the current RWC, the current TOC average limit (based on Recycled Water Specification A.10), the calculated monthly TOC averages, compliance with the TN limit, and recharged water monitoring plans for TOC and TN. Some



of these correction factors and locations for the compliance sampling have been modified since the basin's startup reports. These changes are described below.

In June 2015, the DDW issued a letter that approved the request for 50% RWC for most of the GWR basins, with the exception of RP3, San Sevaine 5, and Turner Basins. The letter stated that based on the data that was provided: "For most of the recharge basins, the data does show an increasing amount of EC and chloride in the mound monitoring wells over time, indicating that recycled water is reaching the mound. Corresponding TOC data from the mound monitoring wells also show a consistent TOC level of less than 1.0 mg/L when recycled water is present; therefore, increasing the RWC limit to 50 percent for some basins is justified." Starting 1Q17, the TOC reduction factor at the 8th Street Basin was amended to 88% to align with the DDW's evaluation and allowance of a 50% RWC. The 80% reduction factor was determined based on mound monitoring well data from 2008 to 2016.

During 1Q19, there were no exceedances of TOC and TN at the basins that have implemented alternative monitoring plans.

#### **D. Diluent Water**

In addition to recycled water recharge, the two other recharge water sources are imported water and stormwater / local runoff; these two types of water are considered diluent water. Imported water and stormwater / local runoff must be sampled quarterly in accordance with the DDW-approved Diluent Water Monitoring Plan.

Details on the methods used to measure daily diluent water flow and diluent water monitoring schedule can be found in the Diluent Water Monitoring Plan. The quarterly sampling schedule for stormwater and local runoff is presented in Table 4-2 of the plan. Stormwater is sampled during the rainy season (1<sup>st</sup> and 4<sup>th</sup> quarters) and local runoff is sampled during the dry season (2<sup>nd</sup> and 3<sup>rd</sup> quarters). Samples are collected at about half the locations during each seasonal quarter, alternating between even and odd years. Table 5-1 of the plan summarizes the sample type and reporting frequency for the parameters listed in Tables I, II, III, and IV of the Diluent Water Monitoring requirement III.3 of the MRP. For 1Q19, diluent water quality sampling of stormwater was conducted during the month of January 2019. Table 2-7 lists the results of the local runoff sampling and analyses.

The monitoring for PFOS and PFOA added to the diluent water during 4Q18 to comply with the monitoring requirement for NLs found in Title 22 CCR, Division 4, Chapter 3. Article 5.1, §60320.114.

#### **E. Groundwater Monitoring Wells**

Monitoring is conducted at groundwater monitoring wells quarterly and annually to evaluate groundwater quality conditions in the vicinity of the recharge basins utilizing recycled water. Groundwater monitoring results can be used to assess background conditions, time the arrival of recharge waters, and the impact that recharged water has on downgradient water supplies. The wells in the monitoring well networks for Hickory and Banana, Turner, 8<sup>th</sup> Street, Ely, Brooks, RP3, San Sevaine, Victoria, and Declez Basins are summarized in Table 2-8, and presented on Figures 2-1 through 2-7, respectively. Groundwater quality samples are collected and tested quarterly for all constituents listed in Table 1 of Section V in the MRP R8-2007-0039, and annually for constituents specified in the Phase II Findings of Fact, Attachment A in the permit (Bullet 27 in the Conditions Section). The groundwater constituents analyzed from the monitoring wells during quarterly monitoring are presented in Table 2-9a.

Any 1Q19 sample which exceeded primary or secondary MCLs are shown in the table in bold italic font. The DDW is notified within 48 hours of receiving the results for primary MCL exceedances or coliform presence at active municipal drinking water wells. Exceedances of primary MCLs and coliform presence at non-drinking water monitoring wells and all secondary MCL exceedances are not reported to the DDW but are reported in the quarterly reports. Of note are the analyses for the following wells and constituents:

---

Turbidity exceeding the secondary MCL of 5 NTU was observed in six monitoring wells, namely: T-2/1, Southridge JHS, BRK-2/1, SSV-2, VCT-1/1, and DCZ-1/1. The secondary MCL for color of 15 units was exceeded at T-2/1, BRK-2/1, and DCZ-1/1. The secondary MCL for iron of 300 µg/L was exceeded at Bishop of San Bernardino Corporation well.

TDS and EC were higher than their secondary MCLs of 500 mg/L and 900 µmhos/cm, respectively, in Southridge JHS, ALCOA MW3, and Ely MW2. The wells south of the Ely Basins and near the RP3 Basins are located in areas where the TDS and EC concentrations in groundwater are historically elevated. The distribution of TDS concentrations observed at wells in the Chino Basin is summarized in Watermaster's State of the Basin Reports.

Some monitoring wells at the 8<sup>th</sup> Street, RP3, Brooks, Turner, and Ely monitoring well networks have nitrate as nitrogen (NO<sub>3</sub>-N) concentrations above the primary MCL of 10 mg/L. The NO<sub>3</sub>-N levels range from 10 to 30 mg/L and are characteristic of groundwater quality in these areas of the Chino Basin. The distribution of NO<sub>3</sub>-N concentrations observed at wells in the Chino Basin is summarized in Watermaster's State of the Basin Reports. No notifications were made to the DDW as these high NO<sub>3</sub>-N concentrations are comparable to the ambient NO<sub>3</sub>-N concentration in groundwater for each monitoring well's respective groundwater management zone within the Chino Basin.

The current State of the Basin Report, which is the "Chino Basin Optimum Basin Management Program 2016 State of the Basin Report" published in June 2017 was prepared by Wildermuth Environmental for the CBWM. The 2016 State of the Basin report can be downloaded from CBWM's website, [www.cbwm.org](http://www.cbwm.org).

### 3. Recharge Operations

IEUA's GWR staff records the daily volumes of water routed to all basins. The 8<sup>th</sup> Street, Banana, Brooks, Declez, Ely, Hickory, RP3, Turner, and Victoria Basins received recycled water this quarter. Table 3-1 lists the volumes of recycled water and diluent water (local runoff, stormwater, and/or imported water) captured during the most recent four quarters at the basins that have initiated recharge using recycled water.

### 4. Operational Problems & Preventive or Corrective Actions

No operational problems were encountered this quarter, therefore no corrective actions were necessary for the following: Regional Water Recycling Facilities - RP-1 & RP-4 and recharge operations.

Several monitoring wells were not sampled during 1Q19: Ontario Well Nos. 25, 29, and 35 were experiencing mechanical difficulties; Ely MW1 is inoperative due to a pump being stuck in the well; Pomona Well No. 10 was offline; VCT-2/2 experienced an electrical failure; and JCSD Well No. 17 was undergoing maintenance

### 5. Certification of Non-Pumping in the Buffer Zones

Watermaster has certified that there was no reported pumping of groundwater in 1Q19 for domestic or municipal use from the buffer zones that extend 500 feet and 6 months underground travel time from the 8<sup>th</sup> Street, Banana, Brooks, Declez, Ely, Hickory, RP3, San Sevaive, Turner, and Victoria Basins. In fact, there are no domestic or municipal production wells within the buffer zones of these aforementioned recharge sites.

IEUA continues to work with the San Bernardino County Department of Environmental Health Services (SBCDEHS) to prevent the drilling and construction of new drinking water wells within the buffer zones. SBCDEHS has initiated control over production well permitting within the buffer zones of all recharge sites through the use of buffer zone maps that utilize the same land coordinate system

(Township/Range/Section/40-acre Parcel) that is used in the permitting process. SBCDEHS reviews new well permit applications, in part, by checking the proposed location of a new drinking water well against recharge basin location maps and parcel lists, both provided by IEUA. The maps and lists show township/range/section parcels (40-acre parcels) that abut recharge basins and their 500-foot buffers.

If a proposed well falls within an abutting parcel, SBCDEHS will review the well location using maps of the basins and buffer zones. If the well falls too near the buffer zone boundary for SBCDEHS to determine the relationship of the proposed well location to the buffer boundary, SBCDEHS will defer to IEUA for a prompt field review of the proposed well location. The field review may include contacting and having the well applicant identify the exact location of the proposed well casing. To conduct a detailed field review, SBCDEHS will contact and provide the IEUA Groundwater Recharge Coordinator with a copy of the well permit application and a timeline for the completion of IEUA's review. Following the review, IEUA will notify SBCDEHS of its findings in writing. IEUA will also notify the DDW and the Regional Board of well permit applications that it recommends should be declined due to well locations determined to fall within a 500-foot buffer zone.

## 6. MVWD ASR Project

Reporting for the Monte Vista Water District (MVWD) Aquifer Storage and Recovery (ASR) project was allowed by the Regional Board to be included under IEUA/Watermaster Phase I Groundwater Recharge Order No. R8-2005-0033 and subsequent permit updates. In April 2007, MVWD, Watermaster, and IEUA entered into an agreement to report the MVWD ASR project groundwater injection/recovery volumes and TIN/TDS mass balance in the recharge program quarterly reports. Initial injection began in June 2007. In September 2017, MVWD restarted injection activities for the first time since September 2011. The injection activities continued through May 2018. Table 6-1 summarizes the monthly volumes and TIN/TDS of injected and recovered water. The table also includes the mass balance of TIN/TDS from the injection-recovery cycles.

Table 2-1a  
 Recycled Water Monitoring: RP-1 & RP-4 Effluent Water Quality for January 2019  
 (Recycled Water Quality Specifications A.5, A.7, A.8, & A.9)

Unit	RP-1 Effluent										RP-4 Effluent									
	Turbidity <sup>1,2,7</sup>	TOC	NO <sub>3</sub> -N	TN	TIN <sup>3</sup>	pH <sup>7</sup>	EC <sup>7</sup>	TDS <sup>3</sup>	Hardness	Coliform <sup>1,2,4</sup>	Turbidity <sup>1,2,7</sup>	TOC	NO <sub>3</sub> -N	TN	TIN <sup>3</sup>	pH <sup>7</sup>	EC	TDS <sup>3</sup>	Hardness	Coliform <sup>1,2,4</sup>
Limits	2;5;10	16 <sup>5</sup>		5 <sup>6</sup>		6<pH<9				2.2;23;240	2;5;10	16 <sup>5</sup>		5 <sup>6</sup>	6<pH<9					2.2;23;240
01/01/19	0.6	5.7				6.9	684			29	0.5	4.2			6.9	730				<1
01/02/19	0.5	6.0	6.6			6.8	680			<1	0.5	4.5	4.3		6.8	733				<1
01/03/19	0.6	6.1				6.8	694			<1	0.5	4.4			6.8	719				<1
01/04/19	0.6	6.0				6.8	715			<1	0.5	4.4			6.8	732				<1
01/05/19	0.6	6.0				6.8	730			<1	0.5	4.5			6.8	760				<1
01/06/19	0.6	6.0	4.6	4.6	4.6	6.8	725	464		<1	0.5	4.6	3.9		6.8	773	450			<1
01/07/19	0.6	6.0				6.8	714			<1	0.5	5.5			6.7	781				<1
01/08/19	0.6	6.1				6.8	732			QC	0.5	4.7			6.7	792				QC
01/09/19	0.6	6.4	4.2			6.8	750			<1	0.5	4.8	4.2		6.7	792				<1
01/10/19	0.7	6.0				6.8	761			<1	0.5	4.7			6.6	820				<1
01/11/19	0.7	6.0				6.8	767			1	0.5	4.7			6.6	831				<1
01/12/19	0.6	6.0				6.8	765			<1	0.5	4.7			6.6	842				<1
01/13/19	0.6	6.1	4.4	4.4	4.4	6.8	746	478		<1	0.5	4.9	4.3		6.6	841	484			<1
01/14/19	0.6	5.8				6.8	774			<1	0.5	4.8			6.7	836				<1
01/15/19	0.6	6.0				6.8	732			<1	0.4	4.9			6.6	823				<1
01/16/19	0.6	5.8	5.3			6.7	709			1	0.4	4.8	4.7		6.6	812				<1
01/17/19	0.7	5.2				6.7	676			<1	0.5	4.8			6.7	750				<1
01/18/19	0.7	5.4				6.6	683			<1	0.4	4.5			6.6	744				<1
01/19/19	0.6	5.8				6.7	745			<1	0.5	4.8			6.6	830				<1
01/20/19	0.6	6.0	4.8	4.8	4.8	6.8	748	472		<1	0.4	5.2	3.6		6.7	817	476			<1
01/21/19	0.5	6.1				6.8	758			1	0.4	5.1			6.7	835				<1
01/22/19	0.5	6.2				6.8	790			<1	0.5	5.2			6.9	832				<1
01/23/19	0.5	6.7				6.8	798			<1	0.5	5.2	4.5		6.9	837				<1
01/24/19	0.5	6.2				6.9	769			<1	0.5	5.0			6.9	823				<1
01/25/19	0.6	6.2				6.9	783			<1	0.5	5.1			6.9	758				<1
01/26/19	0.5	6.1				6.9	805			<1	0.5	5.1			7.0	790				<1
01/27/19	0.5	6.3	5.5	5.5	5.5	6.9	793	484	150	<1	0.5	5.4	2.9		6.9	758	464			<1
01/28/19	0.6	6.4				6.9	744			<1	0.6	5.3			6.9	754				<1
01/29/19	0.6	6.2				6.9	728			<1	0.5	5.2			6.9	803				<1
01/30/19	0.6	6.4	4.3			6.9	719			<1	0.4	5.3	3.9		6.9	794				<1
01/31/19	0.6	5.8				6.9	710			<1	0.4	4.8			7.0	800				<1
Avg	0.6	6.0	5.0	4.8	4.8	6.8	740	475	150	<2	0.5	4.9	4.0		6.8	792	469			<1
Min	0.5	5.2	4.2	4.4	4.4	6.6	676	464	150	<1	0.4	4.2	2.9		6.6	719	450			<1
Max	0.7	6.7	6.6	5.5	5.5	6.9	805	484	150	29	0.6	5.5	4.7		7.0	842	484			<1

Note: **Bolded characters signify an exceedance of a permit limitation** Limited monitoring during IEUA lab relocation. RW Blend is monitored at the required permit frequency.

Blank cells indicate that analysis was not run for a constituent on that particular date. The data presented meets/exceeds the frequency of analysis specified under the discharge permit for these facilities.

<sup>1</sup> Turbidity and coliform must meet water quality standards for disinfected tertiary treated recycled water, as specified in NPDES No. CA8000409, Order No. R8-2009-0021.

<sup>2</sup> Turbidity limits: 2 NTU average daily; 5 NTU no more than 5% of day; 10 NTU at any time. Coliform limits: 2.2 MPN/100mL 7-day median; 23 MPN/100mL in no more than 1 sample per month; 240 MPN/100mL at any time.

<sup>3</sup> TDS and TIN limits are based on the 12-month running average of the combined effluent from all plants, which are presented in Table 2-2.

<sup>4</sup> Monthly average for coliform is based on "non-detect" values equal to 2. Determination of "less than" is dependent on the number of "non-detect" occurrences more than half the days in the month.

<sup>5</sup> TOC shall not exceed 16 mg/L for more than two consecutive samples and an average of the last 4 sample results. TOC compliance can be met at a point prior to reaching the regional groundwater table, including lysimeters.

<sup>6</sup> TN compliance can be met at a point prior to reaching the regional groundwater table, including lysimeters.

<sup>7</sup> These values based on continuous monitoring data generated by the Supervisory Control and Data Acquisition (SCADA) system.

Table 2-1b  
 Recycled Water Monitoring: RP-1 & RP-4 Effluent Water Quality for February 2019  
 (Recycled Water Quality Specifications A.5, A.7, A.8, & A.9)

Unit	RP-1 Effluent										RP-4 Effluent									
	Turbidity <sup>1,2,7</sup>	TOC	NO <sub>3</sub> -N	TN	TIN <sup>3</sup>	pH <sup>7</sup>	EC <sup>7</sup>	TDS <sup>3</sup>	Hardness	Coliform <sup>1,2,4</sup>	Turbidity <sup>1,2,7</sup>	TOC	NO <sub>3</sub> -N	TN	TIN <sup>3</sup>	pH <sup>7</sup>	EC	TDS <sup>3</sup>	Hardness	Coliform <sup>1,2,4</sup>
Limits	2;5;10	16 <sup>5</sup>		5 <sup>6</sup>		6<pH<9				2.2;23;240	2;5;10	16 <sup>5</sup>		5 <sup>6</sup>	6<pH<9					2.2;23;240
02/01/19	0.6	5.7				6.8	704			<1	0.4	4.9			7.0					<1
02/02/19	0.6	6.0				6.8	699			<1	0.4	4.8			7.0	766				<1
02/03/19	0.6	5.4	4.2	4.2	4.2	6.7	609	400		<1	0.4	4.8	3.7		7.0	721	412			<1
02/04/19	0.6	5.7				6.8	636			<1	0.4	4.7			7.1	746				<1
02/05/19	0.6	5.8				6.8	642			<1	0.4	4.7			7.1	742				<1
02/06/19	0.6	6.2				6.9	673			1	0.4	4.9	3.9		7.1	732				<1
02/07/19	0.6	5.7				6.9	689			2	0.4	5.1			7.1	730				<1
02/08/19	0.6	5.6				6.9	693			<1	0.4	4.7			7.1	738				<1
02/09/19	0.7	5.7				6.9	705			1	0.3	4.8			7.1	742				<1
02/10/19	0.7	6.0	5.0	5.0	5.0	6.9	702	440		<1	0.3	5.0	3.7		7.1	743	430			<1
02/11/19	0.6	6.4	5.0		5.0	6.9	657			<1	0.3	5.2	3.6		7.1	737				<1
02/12/19	0.6	6.8				6.8	630			<1	0.3	5.0			7.1	728				<1
02/13/19	0.6	7.0	3.7		3.7	6.9	640			<1	0.3	5.0	4.0		7.1	708				<1
02/14/19	0.7	6.3				6.8	588			<1	0.4	4.5			7.1	670				<1
02/15/19	0.7	5.8				6.7	533			<1	0.3	4.2			7.0	635				<1
02/16/19	0.7	6.2				6.8	591			<1	0.4	4.6			7.0	707				<1
02/17/19	0.6	6.5				6.8	596			<1	0.4	4.9			7.1	726				<1
02/18/19	0.5	7.1				6.8	598			1	0.4	4.9			7.1	734				<1
02/19/19	0.6	7.1				6.9	620			<1	0.4	5.0			7.1	725				<1
02/20/19	0.6	7.2	4.1	4.1	4.1	6.8	636	456	148	<1	0.4	4.8	4.5	4.5	4.6	7.1	727	438	136	<1
02/21/19	0.6	7.0				6.9	633			<1	0.4	0.0			7.1					<1
02/22/19	0.6	6.7				6.9	637			<1	0.3	4.9			7.1	742				<1
02/23/19	0.6	7.1				6.9	635			<1	0.3	5.0			7.1	741				<1
02/24/19	0.5	6.6	4.8	4.8	4.8	6.8	630	432		<1	0.3	5.0	4.4	4.4	4.4	7.1	734	426		<1
02/25/19	0.6	7.4				6.9	619			<1	0.3	5.3	3.9	3.9	7.1	725				3
02/26/19	0.6	7.5	4.1		4.1	6.9	606			<1	0.4	5.2	4.2	4.2	7.1	712				<1
02/27/19	0.6	7.4	4.0		4.0	6.9	597			<1	0.4	5.0	4.8	4.8	7.1	721				<1
02/28/19	0.6	7.3				6.9	610			1	0.4	4.8	4.8	4.8	7.1	728				<1
Avg	0.6	6.5	4.4	4.5	4.4	6.8	636	432	148	<1	0.4	4.7	4.1	4.5	4.3	7.1	725	427	136	<1
Min	0.5	5.4	3.7	4.1	3.7	6.7	533	400	148	<1	0.3	0.0	3.6	4.4	3.6	7.0	635	412	136	<1
Max	0.7	7.5	5.0	5.0	5.0	6.9	705	456	148	2	0.4	5.3	4.8	4.5	4.8	7.1	766	438	136	3

Note: **Bolded characters signify an exceedance of a permit limitation** Limited monitoring during IEUA lab relocation. RW Blend is monitored at the required permit frequency.

Blank cells indicate that analysis was not run for a constituent on that particular date. The data presented meets/exceeds the frequency of analysis specified under the discharge permit for these facilities.

<sup>1</sup> Turbidity and coliform must meet water quality standards for disinfected tertiary treated recycled water, as specified in NPDES No. CA8000409, Order No. R8-2009-0021.

<sup>2</sup> Turbidity limits: 2 NTU average daily; 5 NTU no more than 5% of day; 10 NTU at any time. Coliform limits: 2.2 MPN/100mL 7-day median; 23 MPN/100mL in no more than 1 sample per month; 240 MPN/100mL at any time.

<sup>3</sup> TDS and TIN limits are based on the 12-month running average of the combined effluent from all plants, which are presented in Table 2-2.

<sup>4</sup> Monthly average for coliform is based on "non-detect" values equal to 2. Determination of "less than" is dependent on the number of "non-detect" occurrences more than half the days in the month.

<sup>5</sup> TOC shall not exceed 16 mg/L for more than two consecutive samples and an average of the last 4 sample results. TOC compliance can be met at a point prior to reaching the regional groundwater table, including lysimeters.

<sup>6</sup> TN compliance can be met at a point prior to reaching the regional groundwater table, including lysimeters.

<sup>7</sup> These values based on continuous monitoring data generated by the Supervisory Control and Data Acquisition (SCADA) system.

Table 2-1c  
 Recycled Water Monitoring: RP-1 & RP-4 Effluent Water Quality for March 2019  
 (Recycled Water Quality Specifications A.5, A.7, A.8, & A.9)

Unit	RP-1 Effluent										RP-4 Effluent									
	Turbidity <sup>1,2,7</sup> NTU	TOC mg/L	NO <sub>3</sub> -N mg/L	TN mg/L	TIN <sup>3</sup> mg/L	pH <sup>7</sup> unit	EC <sup>7</sup> µhmo/cm	TDS <sup>3</sup> mg/L	Hardness mg/L	Coliform <sup>1,2,4</sup> mpn/100mL	Turbidity <sup>1,2,7</sup> NTU	TOC mg/L	NO <sub>3</sub> -N mg/L	TN mg/L	TIN <sup>3</sup> mg/L	pH <sup>7</sup> unit	EC µhmo/cm	TDS <sup>3</sup> mg/L	Hardness mg/L	Coliform <sup>1,2,4</sup> mpn/100mL
Limits	2;5;10	16 <sup>5</sup>		5 <sup>6</sup>		6<pH<9				2.2;23;240	2;5;10	16 <sup>5</sup>		5 <sup>6</sup>	6<pH<9					2.2;23;240
03/01/19	0.5	7.0				6.9	614			<1	0.4	5.1			7.1	720				<1
03/02/19	0.5	6.7				6.9	607			1	0.4	4.9			7.1	719				<1
03/03/19	0.5	6.6	5.1	5.1	5.1	6.8	568	412		2	0.3	5.2	3.5	4.4	3.5	7.1	707	422		<1
03/04/19	0.5	7.6	5.2		5.2	6.9	591			<1	0.3	5.4	3.0		3.0	7.1	728			1
03/05/19	0.5	7.9	5.0		5.0	6.9	618			<1	0.3	5.2	3.6		3.6	7.1	689			2
03/06/19	0.5	7.7	4.7		4.7	6.9	619			<1	0.3	5.3	4.3		4.3	7.1	723			<1
03/07/19	0.5	7.2	4.1		4.1	6.8	573			<1	0.3	4.9	4.7		4.7	7.0	661			<1
03/08/19	0.6	7.1				6.9	594			<1	0.3	5.0			7.1	671				<1
03/09/19	0.5	7.5				6.9	633			<1	0.3	5.2			7.1	689				<1
03/10/19	0.5	7.9	4.3	4.3	4.3	6.9	632	468	151	1	0.4	5.0	3.4	4.0	3.4	7.1	704	428	134	<1
03/11/19	0.6	7.1	6.1		6.1	6.8	675			<1	0.4	5.4	3.1		3.1	7.1	700			<1
03/12/19	0.7	8.2	4.7		4.7	6.9	642			<1	0.4	5.3	3.6		3.6	7.1	698			<1
03/13/19	0.8	8.2	3.8		3.8	6.9	674			1	0.4	4.9	4.2		4.2	7.1	699			<1
03/14/19	0.7	8.0	4.2		4.2	6.9	706			<1	0.4	5.1	4.7		4.7	7.1	686			<1
03/15/19	0.7	7.6				7.0	721			<1	0.4	5.2			7.2	687				<1
03/16/19	0.7	7.8				6.9	723			<1	0.4	5.3			7.1	700				<1
03/17/19	0.8	7.6	5.7	5.7	5.7	6.9	705	460		<1	0.4	5.6	3.6	4.1	3.6	7.1	702	426		<1
03/18/19	0.8	8.6	5.6		5.6	6.9	726			2	0.4	5.7	3.3		3.3	7.1	697			1
03/19/19	0.8	8.3	5.1		5.1	6.9	774			<1	0.4	5.4	3.2		3.2	7.1	703			<1
03/20/19	0.9	8.5	5.8		5.8	6.9	799			<1	0.5	5.5	3.5		3.5	7.2	715			<1
03/21/19	0.8	8.0				6.9	807			<1	0.4	5.2			7.1	683				<1
03/22/19	0.8	7.9				6.9	812			1	0.4	5.6			7.1	742				<1
03/23/19	0.7	7.7				6.9	829			<1	0.4	5.5			7.1	736				<1
03/24/19	0.7	8.0	5.0	5.0	5.0	6.9	821	462		<1	0.4	6.1	3.5	4.0	3.5	7.1	757	434		<1
03/25/19	0.7	8.7	5.3		5.3	6.9	816			<1	0.4	5.7	2.9		2.9	7.1	711			<1
03/26/19	0.7	8.7	5.2		5.2	6.9	769			<1	0.4	5.5	3.3		3.3	7.1	737			<1
03/27/19	1.0	9.6	5.3		5.3	7.0	686			<1	0.4	5.8	3.8		3.8	7.1	743			<1
03/28/19	0.9	9.1	4.6		4.6	7.0	686			<1	0.4	5.6	4.1		4.1	7.1	753			<1
03/29/19	0.8	8.4				7.0	684			1	0.4	5.4			7.0	716				<1
03/30/19	0.7	8.3				7.0	687			<1	0.4	5.4			7.0	713				<1
03/31/19	0.6	8.3	5.5	5.5	5.5	7.0	670	458		1	0.4	5.7	3.1	3.1	3.1	7.1	724	420		<1
Avg	0.7	7.9	5.0	5.1	5.0	6.9	692	452	151	<1	0.4	5.4	3.6	3.9	3.6	7.1	710	426	134	<1
Min	0.5	6.6	3.8	4.3	3.8	6.8	568	412	151	<1	0.3	4.9	2.9	3.1	2.9	7.0	661	420	134	<1
Max	1.0	9.6	6.1	5.7	6.1	7.0	829	468	151	2	0.5	6.1	4.7	4.4	4.7	7.2	757	434	134	2

Note: **Bolded characters signify an exceedance of a permit limitation**

Blank cells indicate that analysis was not run for a constituent on that particular date. The data presented meets/exceeds the frequency of analysis specified under the discharge permit for these facilities.

<sup>1</sup> Turbidity and coliform must meet water quality standards for disinfected tertiary treated recycled water, as specified in NPDES No. CA8000409, Order No. R8-2009-0021.

<sup>2</sup> Turbidity limits: 2 NTU average daily; 5 NTU no more than 5% of day; 10 NTU at any time. Coliform limits: 2.2 MPN/100mL 7-day median; 23 MPN/100mL in no more than 1 sample per month; 240 MPN/100mL at any time.

<sup>3</sup> TDS and TIN limits are based on the 12-month running average of the combined effluent from all plants, which are presented in Table 2-2.

<sup>4</sup> Monthly average for coliform is based on "non-detect" values equal to 2. Determination of "less than" is dependent on the number of "non-detect" occurrences more than half the days in the month.

<sup>5</sup> TOC shall not exceed 16 mg/L for more than two consecutive samples and an average of the last 4 sample results. TOC compliance can be met at a point prior to reaching the regional groundwater table, including lysimeters.

<sup>6</sup> TN compliance can be met at a point prior to reaching the regional groundwater table, including lysimeters.

<sup>7</sup> These values based on continuous monitoring data generated by the Supervisory Control and Data Acquisition (SCADA) system.



Table 2-2  
 Recycled Water Monitoring: Agency-Wide Flow-Weighted TIN & TDS (mg/L)  
 (Recycled Water Quality Specifications A.6)

Date	TIN		TDS	
	Monthly	12-Mo. Run Avg.	Monthly	12-Mo. Run Avg.
Apr-18	5.0	5.8	485	460
May-18	4.8	5.7	495	463
Jun-18	4.7	5.6	490	465
Jul-18	4.6	5.4	484	468
Aug-18	4.3	5.3	478	471
Sep-18	5.2	5.3	467	473
Oct-18	4.7	5.1	496	479
Nov-18	5.9	5.1	505	483
Dec-18	5.0	4.9	487	487
Jan-19	6.2	5.0	503	490
Feb-19	4.9	5.0	485	490
Mar-19	5.7	5.1	495	489
Avg	5.1	5.3	489	477
Min	4.3	4.9	467	460
Max	6.2	5.8	505	490
Limit		8.0		550

Date source: IEUA NPDES monthly self-monitoring report (MRP No. R8-2009-0021).  
 Per the Regional Board, TDS is calculated using the flow-weighted averages based on discharged effluent flows and recycled water flows; TIN is calculated using the flow-weighted averages based on discharged effluent flows only.  
 The data reported above will supersede any information submitted for previous quarters. Agency-wide TIN & TDS were in compliance with permit limits at all times.

Table 2-3  
 Recycled Water Monitoring: Primary & Secondary Maximum Contaminant Levels  
 (Recycled Water Quality Specifications A.1, A.2, A.3, & A.15)

Constituent	2Q18	3Q18	4Q18	1Q19	4Q Run. Avg. <sup>1</sup>	Limit	Unit	Method
Inorganic Chemicals								
Aluminum	80	32	72	96	70	1000	µg/L	EPA 200.8
Antimony	<1	<1	<1	<1	<1	6	µg/L	EPA 200.8
Arsenic	<2	<2	<1	<2	<2	10	µg/L	EPA 200.8
Asbestos	<0.2	<0.2	<0.2	<0.16	<0.2	7	MFL	EPA 100.2
Barium	12	18	15	14	15	1000	µg/L	EPA 200.8
Beryllium	<0.5	<0.5	<1	<0.5	<1	4	µg/L	EPA 200.8
Cadmium	<0.25	<0.25	<0.5	<0.25	<0.5	5	µg/L	EPA 200.8
Chromium	1.4	1.8	<1	1.9	1.5	50	µg/L	EPA 200.8
Chromium VI <sup>2</sup>	0.20	0.36	0.28	0.24	0.27	10	µg/L	EPA 218.6
Cyanide	<20	<20	<25	<20	<25	150	µg/L	SM 4500-CN E
Fluoride	0.2	0.2	0.2	0.2	0.2	2	mg/L	SM 4500-F C
Mercury	<0.5	<0.5	<0.2	<0.5	<0.5	2	µg/L	EPA 245.2
Nickel	3	3	<5	2	<5	100	µg/L	EPA 200.8
Perchlorate	<4	<4	<4	<4	<4	6	µg/L	EPA 314/331.0
Selenium	<2	<2	<5	<2	<5	50	µg/L	EPA 200.8
Thallium	<1	<1	<1	<1	<1	2	µg/L	EPA 200.8
Volatile Organic Chemicals (VOCs)								
Benzene	<0.5	<0.5	<0.5	<0.5	<0.5	1	µg/L	EPA 524.2
Carbon Tetrachloride	<0.5	<0.5	<0.5	<0.5	<0.5	0.5	µg/L	EPA 524.2
1,2-Dichlorobenzene	<0.5	<0.5	<0.5	<0.5	<0.5	600	µg/L	EPA 524.2
1,4-Dichlorobenzene	<0.5	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
1,1-Dichloroethane	<0.5	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
1,2-Dichloroethane	<0.5	<0.5	<0.5	<0.5	<0.5	0.5	µg/L	EPA 524.2
1,1-Dichloroethylene	<0.5	<0.5	<0.5	<0.5	<0.5	6	µg/L	EPA 524.2
cis-1,2-Dichloroethylene	<0.5	<0.5	<0.5	<0.5	<0.5	6	µg/L	EPA 524.2
trans-1,2-Dichloroethylene	<0.5	<0.5	<0.5	<0.5	<0.5	10	µg/L	EPA 524.2
Dichloromethane	<0.5	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
1,2-Dichloropropane	<0.5	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
1,3-Dichloropropene	<0.5	<0.5	0.7	0.7	<0.5	0.5	µg/L	EPA 524.2
Ethylbenzene	<0.5	<0.5	<0.5	<0.5	<0.5	300	µg/L	EPA 524.2
Monochlorobenzene	<0.5	<0.5	<0.5	<0.5	<0.5	70	µg/L	EPA 524.2
Methyl-tert-butyl ether	<0.5	<0.5	<0.5	<0.5	<0.5	13	µg/L	EPA 524.2
Styrene	<0.5	<0.5	<0.5	<0.5	<0.5	100	µg/L	EPA 524.2
1,1,2,2-Tetrachloroethane	<0.5	<0.5	<0.5	<0.5	<0.5	1	µg/L	EPA 524.2
Tetrachloroethylene	<0.5	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
Toluene	<0.5	<0.5	<0.5	<0.5	<0.5	150	µg/L	EPA 524.2
1,2,4-Trichlorobenzene	<0.5	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
1,1,1-Trichloroethane	<0.5	<0.5	<0.5	<0.5	<0.5	200	µg/L	EPA 524.2
1,1,2-Trichloroethane	<0.5	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
Trichloroethylene	<0.5	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
Trichlorofluoromethane	<0.5	<0.5	<0.5	<0.5	<0.5	150	µg/L	EPA 524.2
1,1,2-Trichloro-1,2,2-Trifluoroethane	<0.5	<0.5	<0.5	<0.5	<0.5	1200	µg/L	EPA 524.2
Vinyl Chloride	<0.5	<0.5	<0.5	<0.5	<0.5	0.5	µg/L	EPA 524.2
m,p-Xylene	<0.5	<0.5	<0.5	<0.5	<0.5	1750 <sup>3</sup>	µg/L	EPA 524.2
o-Xylene	<0.5	<0.5	<0.5	<0.5	<0.5	1750 <sup>3</sup>	µg/L	EPA 524.2
1,2,3-Trichloropropane (added 7/17) <sup>4</sup>	<0.005	0.007	<0.005	0.006	<0.005	0.005	µg/L	CASRL 524M-TCP
Non-Volatile Synthetic Organic Chemicals (SOCs)								
Alachlor (Alanex)	<0.1	<0.1	<0.1	<0.1	<0.1	2	µg/L	EPA 505
Atrazine	<0.05	<5	<5	<0.05	<0.05	1	µg/L	EPA 525.2
Bentazon	<0.5	<0.5	<0.5	<0.5	<0.5	18	µg/L	EPA 515.4
Benzo(a)pyrene	<0.02	<0.02	<0.02	<0.02	<0.02	0.2	µg/L	EPA 525.2
Carbofuran	<0.5	<0.5	<0.5	<0.5	<0.5	18	µg/L	EPA 531.2
Chlordane	<0.1	<0.1	<0.1	<0.1	<0.1	0.1	µg/L	EPA 505
2,4-D	<0.1	<0.1	<0.1	<0.1	<0.1	70	µg/L	EPA 515.4
Dalapon	6	8	5	8	7	200	µg/L	EPA 515.4
Dibromochloropropane	0.036	<0.01	<0.01	<0.01	<0.01	0.2	µg/L	EPA 504.1
Di(2-ethylhexyl)adipate	<0.6	<0.6	<0.6	<0.6	<0.6	400	µg/L	EPA 525.2
Di(2-ethylhexyl)phthalate	<0.6	<0.6	<0.6	2.4	<0.6	4	µg/L	EPA 525.2
Dinoseb	<0.2	<0.2	<0.2	<0.2	<0.2	7	µg/L	EPA 515.4
Diquat	<0.4	<0.4	<0.4	<0.4	<0.4	20	µg/L	EPA 549.2
Endothall	<5	<5	<5	<5	<5	100	µg/L	EPA 548.1
Endrin	<0.01	<0.01	<0.01	<0.01	<0.01	2	µg/L	EPA 505

Table 2-3  
Recycled Water Monitoring: Primary & Secondary Maximum Contaminant Levels  
(Recycled Water Quality Specifications A.1, A.2, A.3, & A.15)

Constituent	2Q18	3Q18	4Q18	1Q19	4Q Run. Avg. <sup>1</sup>	Limit	Unit	Method
Ethylene Dibromide	<0.01	<0.01	<0.01	<0.01	<0.01	0.05	µg/L	EPA 504.1
Glyphosate	<6	<6	<6	<6	<25	700	µg/L	EPA 547
Heptachlor	<0.01	<0.04	<0.04	<0.01	<0.01	0.01	µg/L	EPA 505
Heptachlor Epoxide	<0.01	<0.01	<0.01	<0.01	<0.01	0.01	µg/L	EPA 505
Hexachlorobenzene	<0.05	<0.05	<0.05	<0.05	<0.05	1	µg/L	EPA 525.2
Hexachlorocyclopentadiene	<0.05	0.05	<0.05	<0.05	<0.05	50	µg/L	EPA 525.2
Lindane	<0.01	<0.01	<0.01	<0.01	<0.01	0.2	µg/L	EPA 505
Methoxychlor	<0.05	<0.05	<0.05	<0.05	<0.05	30	µg/L	EPA 505
Molinate	<0.1	<0.1	<0.1	<0.1	<0.1	20	µg/L	EPA 525.2
Oxamyl	<0.5	<0.5	<0.5	<0.5	<0.5	50	µg/L	EPA 531.2
Pentachlorophenol	<0.04	<0.04	<0.04	<0.04	<0.04	1	µg/L	EPA 515.4
Picloram	<0.1	<0.1	<0.1	<0.1	<0.1	500	µg/L	EPA 515.4
PCB 1016	<0.08	<0.08	<0.08	<0.08	<0.08	0.5	µg/L	EPA 505
PCB 1221	<0.1	<0.1	<0.1	<0.1	<0.1	0.5	µg/L	EPA 505
PCB 1232	<0.1	<0.1	<0.1	<0.1	<0.1	0.5	µg/L	EPA 505
PCB 1242	<0.1	<0.1	<0.1	<0.1	<0.1	0.5	µg/L	EPA 505
PCB 1248	<0.1	<0.1	<0.1	<0.1	<0.1	0.5	µg/L	EPA 505
PCB 1254	<0.1	<0.1	<0.1	<0.1	<0.1	0.5	µg/L	EPA 505
PCB 1260	<0.1	<0.1	<0.1	<0.1	<0.1	0.5	µg/L	EPA 505
Simazine	<0.05	<0.05	<0.05	<0.05	<0.05	4	µg/L	EPA 525.2
Thiobencarb	<0.2	<0.2	<0.2	<0.2	<0.2	70	µg/L	EPA 525.2
Toxaphene	<0.5	<0.5	<0.5	<0.5	<0.5	3	µg/L	EPA 505
2,3,7,8-TCDD (Dioxin)	<5.12	<4.07	<5	<5	<5.12	30	pg/L	EPA 1613
2,4,5-TP (Silvex)	<0.2	<0.2	<0.2	<0.2	<0.2	50	µg/L	EPA 515.4
Action Level Chemicals								
Copper	4.8	4.0	2.0	6.1	4.2	1300	µg/L	EPA 200.8
Lead	<0.5	<0.5	<0.5	<0.5	<0.5	15	µg/L	EPA 200.8
Radionuclides								
Combined Radium-226 and Radium 228	<0.17	<0.16	0.28	<1	<0.39	5	pCi/L	EPA 903.0
Gross Alpha Particle Activity	<3	<3	<3	<3	<3	15	pCi/L	EPA 900.0/SM7110C
Tritium	<271	<344	<337	<387	<398	20,000	pCi/L	EPA 906
Strontium-90	<1.53	<1.04	<0.90	<3	<1.53	8	pCi/L	EPA 905
Gross Beta Particle Activity	14	13	15	13	14	50	pCi/L	EPA 900.0
Uranium	<0.7	<0.7	<0.7	<0.7	<0.7	20	pCi/L	EPA 200.8
Secondary Maximum Contaminant Level Chemicals								
Aluminum	80	32	72	96	70	200	µg/L	EPA 200.8
Copper	4.8	4.0	2.0	6.1	4.2	1000	µg/L	EPA 200.8
Corrosivity <sup>5</sup>	-0.6 (Non-Cor.)	-0.2 (Non-Cor.)	0.3 (Non-Cor.)	-0.6 (Non-Cor.)	Non-Cor.	Non-Cor.	SI	SM 2330B
Foaming Agents (MBAS) <sup>5</sup>	<0.1	<0.1	<0.1	NR	<0.1	0.5	mg/L	S5540C/EPA 425.1
Iron <sup>5</sup>	NR	NR	63	NR	47	300	µg/L	EPA 200.7
Manganese	21	14	9	16	15	50	µg/L	EPA 200.8
Methyl-tert-butyl ether (MTBE) <sup>5</sup>	<0.5	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
Odor--Threshold <sup>5</sup>	2	40	8	8	15	3	TON	SM 2150B
Silver	<0.25	<0.25	NR	<0.25	<0.25	100	µg/L	EPA 200.8
Thiobencarb	<0.2	<0.2	<0.2	<0.2	<0.5	1	µg/L	EPA 525.2
Zinc	32	35	54	56	44	5000	µg/L	EPA 200.8
Miscellaneous Regulated Constituents								
Oil & Grease <sup>6</sup>	<1	<1	2	<1	<1	1	mg/L	EPA 1664
Disinfection Byproducts								
Bromate	1	1	<1	<1	1	10	µg/L	EPA 300.1/317
Chlorite	<0.01	<0.01	<0.01	<0.01	<0.01	1	mg/L	EPA 300.0
	BRK-LYS-25	DCZ2-LYS-25	DCZ2-LYS-25	BRK-LYS-25	<==TTHMs			
	BRK-LYS-25	DCZ2-LYS-25	DCZ2-LYS-25	BRK-LYS-25	<==HAA5			
	BRK-LYS-25	DCZ2-LYS-25	DCZ2-LYS-25		<==1,2,3-TCP			
Alternative Compliance Point Data								
Total Trihalomethanes (TTHMs)	<2	<2	<2	<2	<2	80	µg/L	EPA 524.2/624
Total Haloacetic Acids (HAA5)	<2	<2	<2	22	<2	60	µg/L	S6251B
1,2,3-Trichloropropane (added 7/17) <sup>4</sup>	<0.005	<0.005	<0.005	--	<0.005	0.005	µg/L	CASRL 524M-TCP

NR: Not required this quarter

<sup>1</sup> 4-quarter running average is calculated based on ND values equal to half the detection limit. The reported 4-quarter running average value, if less than DL, will be based on highest DL found in the data set.

<sup>2</sup> As of September 11, 2017 the MCL for hexavalent chromium that was established in 2014 is no longer in effect; the State Board does plan on establishing a new MCL in the near future.

<sup>3</sup> The sum of m,p-Xylene and o-Xylene is used to calculate compliance for the Total Xylenes limit

<sup>4</sup> 1,2,3-Trichloropropane compliance is based on a 4-quarter running average of lysimeter samples collected prior to reaching the groundwater table

<sup>5</sup> 4-quarter running average is calculated based on the four most recent results. Monitoring is required annually. However, if monitoring takes place more frequently than required, those results will be reported.

<sup>6</sup> Oil & Grease compliance determination not based on 4-quarter running average

**Bold signifies an exceedance of a limit in the Order. Explained in further detail in the report text.**

Table 2-4  
 Recycled Water Monitoring: Remaining Priority Pollutants, EDCs & Pharmaceuticals, and Unregulated Chemicals  
 (Monitoring & Reporting Program)

Constituent	1Q19	Unit	Method	Constituent	1Q19	Unit	Method	
Volatile Organic Chemicals (VOCs)				Pesticides				
Acrolein	NR	µg/L	EPA 624	Nitrobenzene	NR	µg/L	EPA 625	
Acrylonitrile	NR	µg/L	EPA 624	N-Nitroso-di-n-propylamine	NR	µg/L	EPA 625	
Bromoform	<0.5	µg/L	EPA 524.2/624	N-Nitrosodiphenylamine	NR	µg/L	EPA 625	
Chlorodibromomethane	2.9	µg/L	EPA 524.2/624	Phenanthrene	NR	µg/L	EPA 625	
Chloroethane	<0.5	µg/L	EPA 524.2/624	Pyrene	NR	µg/L	EPA 625	
2-Chloroethylvinylether	NR	µg/L	EPA 524.2/624	Aldrin	NR	µg/L	EPA 505/608	
Chloroform	81	µg/L	EPA 524.2/624	BHC, alpha isomer	NR	µg/L	EPA 525/608	
Dichlorobromomethane	21	µg/L	EPA 524.2/624	BHC, beta isomer	NR	µg/L	EPA 525/608	
Methyl Bromide	<0.5	µg/L	EPA 524.2/624	BHC, delta isomer	NR	µg/L	EPA 525/608	
Methyl Chloride	<0.5	µg/L	EPA 524.2/624	4,4'-DDT	NR	µg/L	EPA 525/608	
Acid Extractibles				4,4'-DDE	NR	µg/L	EPA 525/608	
2-Chlorophenol	NR	µg/L	EPA 625	4,4'-DDD	NR	µg/L	EPA 525/608	
2,4-Dichlorophenol	NR	µg/L	EPA 625	Dieldrin	NR	µg/L	EPA 505/608	
2,4-Dimethylphenol	NR	µg/L	EPA 625	Endosulfan I	NR	µg/L	EPA 525/608	
2-Methyl-4,6-dinitrophenol	NR	µg/L	EPA 625	Endosulfan II	NR	µg/L	EPA 525/608	
2,4-Dinitrophenol	NR	µg/L	EPA 625	Endosulfan Sulfate	NR	µg/L	EPA 525/608	
2-Nitrophenol	NR	µg/L	EPA 625	Chemicals w/ State Notification Levels (NLS)				NL
4-Nitrophenol	NR	µg/L	EPA 625	Boron	0.2	mg/L	EPA 200.7	1
4-Chloro-3-methylphenol	NR	µg/L	EPA 625	n-butylbenzene	<0.5	µg/L	EPA 524.2	260
Phenol	NR	µg/L	EPA 625	sec-butylbenzene	<0.5	µg/L	EPA 524.2	260
2,4,6-Trichlorophenol	NR	µg/L	EPA 625	tert-butylbenzene	<0.5	µg/L	EPA 524.2	260
Base/Neutral Extractibles				Carbon disulfide	<0.5	µg/L	EPA 524.2	160
Acenaphthene	NR	µg/L	EPA 625	Chlorate	<10*	µg/L	EPA 300.0	800
Acenaphthylene	NR	µg/L	EPA 625	2-Chlorotoluene	<0.5	µg/L	EPA 524.2	140
Anthracene	NR	µg/L	EPA 625	4-Chlorotoluene	<0.5	µg/L	EPA 524.2	140
Benzidine	NR	µg/L	EPA 625	Diazinon	<0.1	µg/L	EPA 525.2	1.2
Benzo(a)anthracene	NR	µg/L	EPA 625	Dichlorodifluoromethane (Freon 12)	<0.5	µg/L	EPA 524.2	1000
Benzo(b)fluoranthene	NR	µg/L	EPA 625	1,4 - Dioxane	1	µg/L	EPA 522	1
Benzo(g,h,i)perylene	NR	µg/L	EPA 625	Ethylene glycol	<5	mg/L	EPA 8015B	14
Benzo(k)fluoranthene	NR	µg/L	EPA 625	Formaldehyde	54	µg/L	EPA 556	100
Bis(2-chloroethoxy)methane	NR	µg/L	EPA 625	HMX	<0.4	µg/L	EPA 8330B	350
Bis(2-chloroethyl)ether	NR	µg/L	EPA 625	Isopropylbenzene	<0.5	µg/L	EPA 524.2	770
Bis(2-chloroisopropyl)ether	NR	µg/L	EPA 625	Methyl isobutyl ketone (MIBK)	<2	µg/L	EPA 524.2	120
4-Bromophenyl phenyl ether	NR	µg/L	EPA 625	N-Nitrosodiethylamine (NDEA)	<2	ng/L	EPA 521	10
Butyl benzyl phthalate	NR	µg/L	EPA 625	N-nitrosodimethylamine (NDMA)	2	ng/L	EPA 521	10
2-Chloronaphthalene	NR	µg/L	EPA 625	N-propylbenzene	<0.5	µg/L	EPA 524.2	200
4-Chlorophenyl phenyl ether	NR	µg/L	EPA 625	PFOA	13	ng/L	EPA 537	14
Chrysene	NR	µg/L	EPA 625	PFOS	<2	ng/L	EPA 537	13
Dibenzo(a,h)anthracene	NR	µg/L	EPA 625	Propachlor	<0.05	µg/L	EPA 525.2	90
1,3-Dichlorobenzene	NR	µg/L	EPA 625	RDX	<0.4	µg/L	EPA 8330B	0.3
3,3-Dichlorobenzidine	NR	µg/L	EPA 625	Tertiary butyl alcohol	<2	µg/L	EPA 524.2	12
Diethyl phthalate	NR	µg/L	EPA 625	1,2,4-trimethylbenzene	<0.5	µg/L	EPA 524.2	330
Dimethyl phthalate	NR	µg/L	EPA 625	1,3,5-trimethylbenzene	<0.5	µg/L	EPA 524.2	330
Di-n-butyl phthalate	NR	µg/L	EPA 625	2,4,6-Trinitrotoluene	<0.4	µg/L	EPA 8330B	1
2,4-Dinitrotoluene	NR	µg/L	EPA 625	Vanadium	<5	µg/L	EPA 200.8	50
2,6-Dinitrotoluene	NR	µg/L	EPA 625	Health-based and performance indicator CECs for Surface Application				
Di-n-octyl phthalate	NR	µg/L	EPA 625	1,4 - Dioxane	1.1	µg/L	EPA 522	
Azobenzene	NR	µg/L	EPA 625	N-nitrosodimethylamine (NDMA)	2.2	ng/L	EPA 521	
Fluoranthene	NR	µg/L	EPA 625	N-Nitrosomorpholine	7.7	ng/L	EPA 521	
Fluorene	NR	µg/L	EPA 625	PFOA	<2	ng/L	EPA 537	
Hexachlorobutadiene	NR	µg/L	EPA 625	PFOS	13	ng/L	EPA 537	
Hexachlorocyclopentadiene	NR	µg/L	EPA 625	Gemfibrozil	<5	ng/L	LC-MS-MS	
Hexachloroethane	NR	µg/L	EPA 625	Iohexol	11000	ng/L	LC-MS-MS	
Indeno(1,2,3-cd)pyrene	NR	µg/L	EPA 625	Sucralose	39000	ng/L	LC-MS-MS	
Isophorone	NR	µg/L	EPA 625	Sulfamethoxazole	<5	ng/L	LC-MS-MS	
Naphthalene	NR	µg/L	EPA 625					

NR: Not Required (Annual Requirement)

\*Pursuant to the GRRP regulations, recharge water may be monitored in lieu of recycled water. Chlorate was sampled at BRK-LYS-25 during 4Q18 to meet the notification level.

Table 2-5a  
Lysimeter and Surface Water Monitoring: TOC, Nitrogen Species, and EC

Brooks Basin									
Site	Depth, bgs	Date	TOC (Limit = 16 mg/L)	TN*	TIN	NO <sub>3</sub> -N	TKN+NO <sub>2</sub> -N	NO <sub>2</sub> -N	EC
Unit==>	feet	mm/dd/yy	mg/L	mg/L	mg/L	mg/L	mg/L	mg/L	µmho/cm
BRK-LYS-00	0	01/15/19	3.83	2.3	2.3	2.3	<0.5	<0.01	508
BRK-LYS-00	0	02/14/19	3.25	2.1	0.8	0.6	1.5	<0.01	107
BRK-LYS-00	0	03/06/19	3.85	1.4	0.7	0.5	0.9	<0.01	72
BRK-LYS-25	25	01/15/19	5.40	0.9	0.3	<0.1	0.9	<0.01	927
BRK-LYS-25	25	02/14/19	3.15	1.7	<0.2	<0.1	1.7	<0.01	647
BRK-LYS-25	25	03/06/19	2.83	<0.6	<0.2	<0.1	<0.5	<0.01	393
Declez Basin									
DCZ2-LYS-00	0	01/09/19	7.04	4.8	3.1	3.1	1.7	<0.01	612
DCZ2-LYS-00	0	01/23/19	3.4	1.3	0.8	0.6	0.7	<0.01	90
DCZ2-LYS-00	0	02/07/19	3.9	1.2	0.7	0.6	0.6	<0.01	108
DCZ2-LYS-00	0	02/20/19	5.0	2.6	1.3	1.3	1.3	<0.01	110
DCZ2-LYS-00	0	03/07/19	3.7	1.9	0.9	0.7	1.2	<0.01	83
DCZ2-LYS-00	0	03/21/19	4.59	2.7	1.8	1.6	1.1	<0.01	231
DCZ2-LYS-25	25	01/09/19	2.37	<0.6	<0.2	<0.1	<0.5	<0.01	399
DCZ2-LYS-25	25	01/23/19	2.08	<0.6	<0.2	0.1	<0.5	<0.01	398
DCZ2-LYS-25	25	02/07/19	2.61	<0.6	<0.2	<0.1	<0.5	<0.01	393
DCZ2-LYS-25	25	02/20/19	2.04	0.7	<0.2	<0.1	0.7	<0.01	335
DCZ2-LYS-25	25	03/07/19	1.96	<0.6	<0.2	<0.1	<0.5	<0.01	228
DCZ2-LYS-25	25	03/21/19	1.94	<0.6	<0.2	<0.1	<0.5	<0.01	204

\* If TN limit of 5 mg/L is not met prior to the RW distribution system, TN compliance can be met at a point prior to reaching the regional groundwater, including lysimeters.

Table 2-5b  
Alternative Monitoring Plans

Banana Basin							
Date	RW Blend*	RW Blend*	Banana		Banana		
mg/L==>	TOC	TN	TOC (80% reduction)	TN (47% reduction)	TN - 2 sample avg.		
Limit ==>				16 mg/L			5 mg/L
01/07/19	4.97	5.7	0.99	3.0	3.3		
01/14/19	4.63	5.8	0.93	3.1	3.1		
01/21/19	4.93	5.3	0.99	2.8	3.0		
01/28/19	5.80	5.7	1.16	3.0	2.9		
02/04/19	4.30	5.9	0.86	3.1	3.1		
02/11/19	4.95	5.8	0.99	3.1	3.1		
02/19/19	5.24	4.6	1.05	2.4	2.8		
02/25/19	5.11	5.1	1.02	2.7	2.6		
03/04/19	4.90	4.9	0.98	2.6	2.7		
03/11/19	4.95	4.9	0.99	2.6	2.6		
03/20/19	5.89	4.7	1.18	2.5	2.5		
03/25/19	7.01	5.8	1.40	3.1	3.1		

Hickory Basin							
Date	RW Blend*	RW Blend*	Hickory		Hickory		
mg/L==>	TOC	TN	TOC (81% reduction)	TN (27% reduction)	TN - 2 sample avg.		
Limit ==>				16 mg/L			5 mg/L
01/07/19	4.97	5.7	0.94	4.2	4.5		
01/14/19	4.63	5.8	0.88	4.2	4.2		
01/21/19	4.93	5.3	0.94	3.9	4.1		
01/28/19	5.80	5.7	1.10	4.1	4.0		
02/04/19	4.30	5.9	0.82	4.3	4.2		
02/11/19	4.95	5.8	0.94	4.2	4.3		
02/19/19	5.24	4.6	1.00	3.4	3.8		
02/25/19	5.11	5.1	0.97	3.7	3.5		
03/04/19	4.90	4.9	0.93	3.6	3.7		
03/11/19	4.95	4.9	0.94	3.6	3.6		
03/20/19	5.89	4.7	1.12	3.4	3.5		
03/25/19	7.01	5.8	1.33	4.2	4.2		

Turner Basin								
Date	RW Blend*	RW Blend*	Turner 1 & 2		Turner 1 & 2			
mg/L==>	TOC	TN	TOC (70% reduction)	TOC (85% reduction)	TN (87% reduction)	Turner 3 & 4		
Limit ==>				16 mg/L	16 mg/L			5 mg/L
01/07/19	4.97	5.7	1.49	0.75	0.7	0.8		
01/14/19	4.63	5.8	1.39	0.69	0.8	0.7		
01/21/19	4.93	5.3	1.48	0.74	0.7	0.7		
01/28/19	5.80	5.7	1.74	0.87	0.7	0.7		
02/04/19	4.30	5.9	1.29	0.65	0.8	0.8		
02/11/19	4.95	5.8	1.49	0.74	0.8	0.8		
02/19/19	5.24	4.6	1.57	0.79	0.6	0.7		
02/25/19	5.11	5.1	1.53	0.77	0.7	0.6		
03/04/19	4.90	4.9	1.47	0.74	0.6	0.7		
03/11/19	4.95	4.9	1.49	0.74	0.6	0.6		
03/20/19	5.89	4.7	1.77	0.88	0.6	0.6		
03/25/19	7.01	5.8	2.10	1.05	0.8	0.8		

Ely Basin							
Date	RP-1 RW	RP-1 RW	Ely 3 East		Ely 3 East		
mg/L==>	TOC	TN	TOC (76% reduction)	TN (52% reduction)	TN - 2 sample avg.		
Limit ==>				16 mg/L			5 mg/L
01/07/19	5.95	5.2	1.43	2.5	2.8		
01/14/19	6.08	5.3	1.46	2.5	2.5		
01/21/19	6.02	5.6	1.44	2.7	2.6		
01/28/19	6.27	6.3	1.50	3.0	2.8		
02/04/19	5.43	5.0	1.30	2.4	2.7		
02/11/19	5.97	6.1	1.43	2.9	2.7		
02/21/19	7.18	4.1	1.72	2.0	2.4		
02/25/19	6.59	5.6	1.58	2.7	2.3		
03/04/19	6.60	5.7	1.58	2.7	2.7		
03/11/19	7.86	5.0	1.89	2.4	2.6		
03/18/19	7.64	5.7	1.83	2.7	2.6		
03/25/19	7.97	6.0	1.91	2.9	2.8		

\*The recycled water blend of RP-1 & RP-4 effluent is sampled at the NRG Energy (formerly Reliant Energy) turnout point  
Note: TOC & TN compliance is based on two consecutive sample results.



Table 2-5b  
Alternative Monitoring Plans

RP3 Basin					
Date	RW Blend*	RW Blend*	RP3	RP3	
mg/L==>	TOC	TN	TOC (88% reduction)	TN (31% reduction)	TN - 2 sample avg.
Limit ==>			16 mg/L		5 mg/L
01/07/19	4.97	5.7	0.60	3.9	4.3
01/14/19	4.63	5.8	0.56	4.0	4.0
01/21/19	4.93	5.3	0.59	3.7	3.8
01/28/19	5.80	5.7	0.70	3.9	3.8
02/04/19	4.30	5.9	0.52	4.1	4.0
02/11/19	4.95	5.8	0.59	4.0	4.0
02/19/19	5.24	4.6	0.63	3.2	3.6
02/25/19	5.11	5.1	0.61	3.5	3.3
03/04/19	4.90	4.9	0.59	3.4	3.5
03/11/19	4.95	4.9	0.59	3.4	3.4
03/20/19	5.89	4.7	0.71	3.2	3.3
03/25/19	7.01	5.8	0.84	4.0	4.0

8th Street Basin					
Date	RW Blend*	RW Blend*	8th Street	8th Street	
mg/L==>	TOC	TN	TOC (88% reduction)**	TN (75% reduction)	TN - 2 sample avg.
Limit ==>			16 mg/L	5 mg/L	5 mg/L
01/07/19	4.97	5.7	0.60	1.4	1.6
01/14/19	4.63	5.8	0.56	1.5	1.4
01/21/19	4.93	5.3	0.59	1.3	1.4
01/28/19	5.80	5.7	0.70	1.4	1.4
02/04/19	4.30	5.9	0.52	1.5	1.4
02/11/19	4.95	5.8	0.59	1.5	1.5
02/19/19	5.24	4.6	0.63	1.2	1.3
02/25/19	5.11	5.1	0.61	1.3	1.2
03/04/19	4.90	4.9	0.59	1.2	1.3
03/11/19	4.95	4.9	0.59	1.2	1.2
03/20/19	5.89	4.7	0.71	1.2	1.2
03/25/19	7.01	5.8	0.84	1.5	1.5

Victoria Basin					
Date	RW Blend*	RW Blend*	Victoria	Victoria	
mg/L==>	TOC	TN	TOC (78% reduction)	TN (82% reduction)	TN - 2 sample avg.
Limit ==>			16 mg/L	5 mg/L	5 mg/L
01/07/19	4.97	5.7	1.09	1.0	1.1
01/14/19	4.63	5.8	1.02	1.0	1.0
01/21/19	4.93	5.3	1.08	1.0	1.0
01/28/19	5.80	5.7	1.28	1.0	1.0
02/04/19	4.30	5.9	0.95	1.1	1.0
02/11/19	4.95	5.8	1.09	1.0	1.1
02/19/19	5.24	4.6	1.15	0.8	0.9
02/25/19	5.11	5.1	1.12	0.9	0.9
03/04/19	4.90	4.9	1.08	0.9	0.9
03/11/19	4.95	4.9	1.09	0.9	0.9
03/20/19	5.89	4.7	1.30	0.8	0.9
03/25/19	7.01	5.8	1.54	1.0	1.0

\*The recycled water blend of RP-1 & RP-4 effluent is sampled at the NRG Energy (formerly Reliant Energy) turnout point

\*\*Reduction factor amended to align with the DDW's evaluation and allowance for a 50% RWC at 8th Street Basin; using mound monitoring well data (2008-2016) to calculate percent reduction in place of the available lysimeter data used in the start-up period report.

Note: TOC & TN compliance is based on two consecutive sample results.

NA: Not Analyzed

Brooks Basin			
Date	BRK-LYS-00	BRK-LYS-00	BRK-LYS-00
	TOC (mg/L)	TN (mg/L)	EC (µmhos/cm)
01/15/19	3.83	2.3	508
02/14/19	3.25	2.1	107
03/06/19	3.85	1.4	72

Date	BRK-LYS-25	BRK-LYS-25	BRK-LYS-25
	TOC (mg/L)	TN* (mg/L)	TN - 2 sample avg. EC (µmhos/cm)
Limit==>			5 mg/L
01/15/19	5.40	0.9	927
02/14/19	3.15	1.7	647
03/06/19	2.83	<0.6	393

Date	BRK-1/1	BRK-1/1	BRK-1/1
	TOC* (mg/L)	TN (mg/L)	EC (µmhos/cm)
Limit==>	16 mg/L		
01/30/19	0.30	2.5	527
02/25/19	0.31	2.0	542
03/06/19	0.32	2.1	524

\*BRK-LYS-25 is the compliance point for TN and BRK-1/1 is the compliance point for TOC.

Table 2-6  
RWC, TOC Average, and TN Compliance Summary

Basin	SUP Start Date	SUP End Date	SUP Report Submittal	RWC Limit	Mos. in Operation (Mar 2019)	RWC <sub>AVG</sub> (Mar 2019)	TOC <sub>AVG</sub> Limit* (mg/L)	Jan 2019 TOC <sub>AVG</sub> (mg/L)	Feb 2019 TOC <sub>AVG</sub> (mg/L)	Mar 2019 TOC <sub>AVG</sub> (mg/L)	1Q19 TN Limit Compliance	Recharged Water Monitoring Plan
8 <sup>th</sup> Street	Sep-07	Dec-10	05/23/11	50%	139	22%	2.3	0.6	0.6	0.7	Met	Alternative monitoring: <u>Weekly</u> RW Blend with TOC reduction of 88% and TN reduction of 75%
Banana	Jul-05	Jan-06	10/27/06	50%	165	36%	1.4	3.0	2.9	2.7	Met	Alternative monitoring: <u>Weekly</u> RW Blend with TOC reduction of 80% and TN reduction of 47%
Brooks	Aug-08	Dec-09	07/29/10	50%	128	16%	3.1	0.3	0.3	0.3	Met	Alternative monitoring: <u>Monthly</u> lysimeter monitoring at 0- and 25-foot bgs & BRK-1/1 for EC, TOC, TN. 25-foot lysimeter compliance point for TN and BRK-1/1 for TOC. <u>Monthly</u> BRK-1/1 analyzed for chloride to verify presence of RW (monitoring ceased 3Q18 since RW presence has been verified).
Declaz	Dec-15	Sep-16	TBD	TBD	40	7%	7.1	2.2	2.3	2.0	Met	Alternative monitoring: Initial year monitoring - <u>Every other week</u> lysimeter monitoring at 0- and 25-ft for EC, TOC, TN. Future years - <u>Weekly</u> RW Blend with TOC reduction of 62% and TN reduction of 91%
Ely	RW initiated Sep-99	NA	NA	50%	235	23%	2.2	1.5	1.5	1.8	Met	Alternative monitoring: <u>Weekly</u> RP-1 RW sample with TOC reduction of 76% and TN reduction of 52%
Hickory	Sep-05	Feb-06	02/15/07	50%	163	22%	2.3	4.2	4.0	3.7	Met	Alternative monitoring: <u>Weekly</u> RW Blend with TOC reduction of 81% and TN reduction of 27%
RP3	Jun-09	Jun-10	12/15/10	50%	118	16%	3.1	0.6	0.6	0.7	Met	Alternative monitoring: <u>Weekly</u> RW Blend with TOC reduction of 88% and TN reduction of 31%
Turner 1&2	Dec-06	May-07	07/03/08	24%	148	23%	2.2	1.5	1.5	1.7	Met	Alternative monitoring: <u>Weekly</u> RW Blend with TOC reduction of 70%; TN reduction of 87%
Turner 3&4	Dec-06	May-07	07/03/08	45%	148	25%	2.0	0.8	0.7	0.9	Met	Alternative monitoring: <u>Weekly</u> RW Blend with TOC reduction of 85% ; TN reduction of 87%
Victoria	Sep-10	Jul-11	02/08/12	50%	103	28%	1.8	1.1	1.1	1.3	Met	Alternative monitoring: <u>Weekly</u> RW Blend with TOC reduction of 78% and TN reduction of 82%

SUP - Start-Up Period

\*TOC<sub>AVG</sub> limit is 0.5 mg/L divided by the RWC<sub>AVG</sub>. Compliance is determined by checking that monthly TOC<sub>AVG</sub> does not exceed the TOC<sub>AVG</sub> limit. If the TOC<sub>AVG</sub> limit is exceeded, the monthly TOC<sub>AVG</sub> will be shown in bold font.

Table 2-7  
Diluent Water Monitoring\*: Stormwater

Constituent	Decleze Channel	Etiwanda Creek	San Sevaine Channel	West Fontana Channel	Max Level to Trigger		
	@ Decleze Basin 01/15/19	@ San Sevaine 5 Basin 01/15/19	@ San Sevaine 1-5 Basins 01/15/19	@ Banana Basin 01/16/19	Source Water Evaluation	Unit	Method
NO <sub>2</sub> -N	<0.05	<0.05	<0.05	0.05	1	mg/L	EPA 300.0
NO <sub>3</sub> -N	0.7	0.2	0.6	1.0	10	mg/L	EPA 300.0
TDS	66	180	53	82	1000	mg/L	SM 2540C
Total Coliform	>1600	>1600	>1600	>1600	-	mpn/100ml	SM 9221B
Oil & Grease	1.3	1.1	1.2	3.5	-	mg/L	EPA 1664A
<b>Inorganic Chemicals</b>							
Aluminum	430	<20	260	720	1000	µg/L	EPA 200.7
Antimony	<1	<1	<1	1	6	µg/L	EPA 200.8
Arsenic	<1	<1	<1	<1	10	µg/L	EPA 200.8
Asbestos	<0.20	<0.20	<0.50	<6.93	7	MFL	EPA 100.2
Barium	13	26	12	34	1000	µg/L	EPA 200.7
Beryllium	<1	<1	<1	<1	4	µg/L	EPA 200.7
Cadmium	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 200.7
Chromium	<1	<1	<1	3	50	µg/L	EPA 200.7
Chromium VI	0.3	0.1	0.4	1.3	10	µg/L	EPA 218.6
Cyanide	<25	<25	<25	<25	150	µg/L	ASTM D7284
Fluoride	<0.2	<0.2	<0.2	<0.2	2	mg/L	SM 4500-F C
Mercury	<0.2	<0.2	<0.2	<0.2	2	µg/L	EPA 245.2
Nickel	<5	<5	<5	<5	100	µg/L	EPA 200.7
Perchlorate	<4	<4	<4	<4	6	µg/L	EPA 314
Selenium	<5	<5	<5	<5	50	µg/L	EPA 200.8
Thallium	<1	<1	<1	<1	2	µg/L	EPA 200.8
<b>Volatile Organic Chemicals (VOCs)</b>							
Benzene	<0.5	<0.5	<0.5	<0.5	1	µg/L	EPA 524.2
Carbon Tetrachloride	<0.5	<0.5	<0.5	<0.5	0.5	µg/L	EPA 524.2
1,2-Dichlorobenzene	<0.5	<0.5	<0.5	<0.5	600	µg/L	EPA 524.2
1,4-Dichlorobenzene	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
1,1-Dichloroethane	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
1,2-Dichloroethane	<0.5	<0.5	<0.5	<0.5	0.5	µg/L	EPA 524.2
1,1-Dichloroethylene	<0.5	<0.5	<0.5	<0.5	6	µg/L	EPA 524.2
cis-1,2-Dichloroethylene	<0.5	<0.5	<0.5	<0.5	6	µg/L	EPA 524.2
trans-1,2-Dichloroethylene	<0.5	<0.5	<0.5	<0.5	10	µg/L	EPA 524.2
Dichloromethane	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
1,2-Dichloropropane	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
1,3-Dichloropropane	<0.5	<0.5	<0.5	<0.5	0.5	µg/L	EPA 524.2
Ethylbenzene	<0.5	<0.5	<0.5	<0.5	300	µg/L	EPA 524.2
Chlorobenzene	<0.5	<0.5	<0.5	<0.5	70	µg/L	EPA 524.2
Methyl Tert-butyl ether (MTBE)	<0.5	<0.5	<0.5	<0.5	13	µg/L	EPA 524.2
Styrene	<0.5	<0.5	<0.5	<0.5	100	µg/L	EPA 524.2
1,1,2,2-Tetrachloroethane	<0.5	<0.5	<0.5	<0.5	1	µg/L	EPA 524.2
Tetrachloroethylene	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
Toluene	<0.5	<0.5	<0.5	<0.5	150	µg/L	EPA 524.2
1,2,4-Trichlorobenzene	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
1,1,1-Trichloroethane	<0.5	<0.5	<0.5	<0.5	200	µg/L	EPA 524.2
1,1,2-Trichloroethane	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
Trichloroethylene	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
Trichlorofluoromethane	<0.5	<0.5	<0.5	<0.5	150	µg/L	EPA 524.2
1,1,2-Trichloro-1,2,2-Trifluoroethane	<0.5	<0.5	<0.5	<0.5	1200	µg/L	EPA 524.2
Vinyl Chloride	<0.5	<0.5	<0.5	<0.5	0.5	µg/L	EPA 524.2
Total Xylenes	<0.5	<0.5	<0.5	<0.5	1750	µg/L	EPA 524.2
1,2,3-Trichloropropane	<0.005	<0.005	<0.005	<0.005	0.005	µg/L	CASRL 524M-TCP
<b>Non-Volatile Synthetic Organic Chemicals (SOCs)</b>							
Alachlor (Alanex)	<0.1	<0.1	<0.1	<0.1	2	µg/L	EPA 505
Atrazine	<0.05	<0.05	<0.05	<0.05	1	µg/L	EPA 525.2
Bentazon	<0.5	<0.5	<0.5	<0.5	18	µg/L	EPA 515.4
Benzo(a)pyrene	<0.02	<0.02	<0.02	<0.02	0.2	µg/L	EPA 525.2
Carbofuran	<0.5	<0.5	<0.5	<0.5	18	µg/L	EPA 531.2
Chlordane	<0.1	<0.1	<0.1	<0.1	0.1	µg/L	EPA 505
2,4-D	0.2	<0.1	0.3	<0.1	70	µg/L	EPA 515.4
Dalapon	<1	<1	<1	<1	200	µg/L	EPA 515.4
Dibromochloropropane	<0.01	<0.01	<0.01	<0.01	0.2	µg/L	EPA 504.1
Di(2-ethylhexyl)adipate	<0.6	<0.6	<0.6	<0.6	400	µg/L	EPA 525.2
Di(2-ethylhexyl)phthalate	0.9	<0.6	0.8	3.2	4	µg/L	EPA 525.2
Dinoseb	<0.2	<0.2	<0.2	<0.2	7	µg/L	EPA 515.4
Diquat	<0.4	<0.4	<0.4	<0.4	20	µg/L	EPA 549.2
Endothall	<5	<5	<5	<5	100	µg/L	EPA 548.1
Endrin	<0.01	<0.01	<0.01	<0.01	2	µg/L	EPA 505
Ethylene Dibromide	<0.01	<0.01	<0.01	<0.01	0.05	µg/L	EPA 504.1
Glyphosate	<6	<6	9	6	700	µg/L	EPA 547
Heptachlor	<0.01	<0.01	<0.01	<0.01	0.01	µg/L	EPA 505
Heptachlor Epoxide	<0.01	<0.01	<0.01	<0.01	0.01	µg/L	EPA 505
Hexachlorobenzene	<0.05	<0.05	<0.05	<0.05	1	µg/L	EPA 525.2
Hexachlorocyclopentadiene	<0.05	<0.05	<0.05	<0.05	50	µg/L	EPA 525.2
Lindane	<0.01	<0.01	<0.01	<0.01	0.2	µg/L	EPA 505

Table 2-7  
Diluent Water Monitoring\*: Stormwater

Constituent	Declez Channel	Etiwanda Creek	San Sevaine Channel	West Fontana Channel	Max Level to Trigger		
	@ Declez Basin 01/15/19	@ San Sevaine 5 Basin 01/15/19	@ San Sevaine 1-5 Basins 01/15/19	@ Banana Basin 01/16/19	Source Water Evaluation	Unit	Method
Methoxychlor	<0.05	<0.05	<0.05	<0.05	30	µg/L	EPA 505
Molinate	<0.1	<0.1	<0.1	<0.1	20	µg/L	EPA 525.2
Oxamyl	<0.5	<0.5	<0.5	<0.5	50	µg/L	EPA 531.2
Pentachlorophenol	<0.04	<0.04	<0.04	0.25	1	µg/L	EPA 515.4
Picloram	<0.1	<0.1	<0.1	<0.1	500	µg/L	EPA 515.4
PCB 1016	<0.08	<0.08	<0.08	<0.08	0.5	µg/L	EPA 505
PCB 1221	<0.1	<0.1	<0.1	<0.1	0.5	µg/L	EPA 505
PCB 1232	<0.1	<0.1	<0.1	<0.1	0.5	µg/L	EPA 505
PCB 1242	<0.1	<0.1	<0.1	<0.1	0.5	µg/L	EPA 505
PCB 1248	<0.1	<0.1	<0.1	<0.1	0.5	µg/L	EPA 505
PCB 1254	<0.1	<0.1	<0.1	<0.1	0.5	µg/L	EPA 505
PCB 1260	<0.1	<0.1	<0.1	<0.1	0.5	µg/L	EPA 505
Simazine	<0.05	<0.05	<0.05	<0.05	4	µg/L	EPA 525.2
Thiobencarb	<0.2	<0.2	<0.2	<0.2	70	µg/L	EPA 525.2
Toxaphene	<0.5	<0.5	<0.5	<0.5	3	µg/L	EPA 505
2,3,7,8-TCDD (Dioxin)	<4.02	<5	<4.02	<4.4	30	pg/L	EPA 1613
2,4,5-TP (Silvex)	<0.2	<0.2	<0.2	<0.2	50	µg/L	EPA 515.4
Disinfection Byproducts							
Total Trihalomethanes (TTHMs)	<0.5	<0.5	<0.5	<0.5	80	µg/L	EPA 524.2/624
Total Haloacetic Acids (HAA5)	<2	<2	2	<2	60	µg/L	SM 6251B
Bromate	<1	<1	3	<1	10	µg/L	EPA 300.1/317
Chlorite	<0.01	<0.01	<0.01	<0.01	1	mg/L	EPA 300.0
Action Level Chemicals							
Copper	6	<2	4	24	1300	µg/L	EPA 200.7
Lead	1.3	<0.5	<0.5	20	15	µg/L	EPA 200.8
Radionuclides							
Combined Radium-226 & Radium 228	<1	<1	<1	<1	5	pCi/L	EPA 903.0
Gross Alpha Particle Activity	<3	<3	<3	<3	15	pCi/L	EPA 900.0/SM7110C
Tritium	<279	<338	<288	<340	20,000	pCi/L	EPA 906.0
Strontium-90	<3	<3	<3	<3	8	pCi/L	EPA 905.0
Gross Beta Particle Activity	<3	5	5	4	50	pCi/L	EPA 900.0
Uranium	<0.7	2.6	<0.7	<0.7	20	pCi/L	EPA 200.8
Chemicals w/ State Notification Levels							
Boron	<0.05	<0.05	<0.05	<0.05	1	mg/L	EPA 200.7
n-butylbenzene	<0.5	<0.5	<0.5	<0.5	260	µg/L	EPA 524.2
sec-butylbenzene	<0.5	<0.5	<0.5	<0.5	260	µg/L	EPA 524.2
tert-butylbenzene	<0.5	<0.5	<0.5	<0.5	260	µg/L	EPA 524.2
Carbon disulfide	<0.5	<0.5	<0.5	<0.5	160	µg/L	EPA 524.2
Chlorate	29	28	78	<10	800	µg/L	EPA 300.0
2-Chlorotoluene	<0.5	<0.5	<0.5	<0.5	140	µg/L	EPA 524.2
4-Chlorotoluene	<0.5	<0.5	<0.5	<0.5	140	µg/L	EPA 524.2
Diazinon	<0.1	<0.1	<0.1	<0.1	1.2	µg/L	EPA 525.2
Dichlorodifluoromethane (Freon 12)	<0.5	<0.5	<0.5	<0.5	1000	µg/L	EPA 524.2
1,4 - Dioxane	<1	<1	<1	<1	1	µg/L	EPA 522
Formaldehyde	8	<5	<5	34	100	µg/L	EPA 556
HMX	<0.1	<0.1	<0.1	<0.1	350	µg/L	LC-MS-MS
Isopropylbenzene	<0.5	<0.5	<0.5	<0.5	770	µg/L	EPA 524.2
Methyl isobutyl ketone (MIBK)	<2	<2	<2	<2	120	µg/L	EPA 524.2
N-Nitrosodiethylamine (NDEA)	<2	2	<2	<2	10	ng/l	EPA 521
N-nitrosodimethylamine (NDMA)	<2	<2	<2	<2	10	ng/l	EPA 521
Propachlor	<0.05	<0.05	<0.05	<0.05	90	µg/L	EPA 525.2
N-propylbenzene	<0.5	<0.5	<0.5	<0.5	200	µg/L	EPA 524.2
PFOA	0.003	<0.002	0.009	<0.002	0.014	µg/L	EPA 537
PFOS	0.002	<0.002	0.003	<0.002	0.013	µg/L	EPA 537
RDX	<0.1	<0.1	<0.1	<0.1	0.3	µg/L	LC-MS-MS
Tertiary butyl alcohol	<2	<2	<2	<2	12	µg/L	EPA 524.2 MOD
1,2,4 -trimethylbenzene	<0.5	<0.5	<0.5	<0.5	330	µg/L	EPA 524.2
1,3,5-trimethylbenzene	<0.5	<0.5	<0.5	<0.5	330	µg/L	EPA 524.2
2,4,6-Trinitrotoluene	<0.1	<0.1	<0.1	<0.1	1	µg/L	LC-MS-MS
Vanadium	<3	<3	<3	4	50	µg/L	EPA 200.8
Secondary Maximum Contaminant Level Chemicals							
Aluminum	430	<20	260	720	200	µg/L	EPA 200.7
Corrosivity	-1.0	1.0	-1.6	--	Non-Cor.	SI	SM 2330B
Foaming Agents (MBAS)	0.1	<0.1	<0.1	0.4	0.5	mg/L	SM 5540C/EPA 425.1
Iron	0.5	<0.02	0.5	3.1	300	µg/L	EPA 200.7
Manganese	8	<2	7	49	50	µg/L	EPA 200.7
Odor--Threshold	2	2	2	4	3	TON	SM 2150B
Silver	<0.5	<0.5	<0.5	<0.5	100	µg/L	EPA 200.7
Thiobencarb	<0.2	<0.2	<0.2	<0.2	1	µg/L	EPA 525.2
Zinc	28	<20	<20	200	5000	µg/L	EPA 200.7

\* Diluent monitoring is monitored per the schedule identified in the CDPH-approved Diluent Water Monitoring Plan

**Bold signifies an exceedance of the maximum level to trigger a source water evaluation. Explained in further detail in the report text.**

Table 2-8  
Summary of Wells in Groundwater Monitoring Networks

BASIN	CBWM_ID	OWNER/LOCAL NAME	SEPARATION DISTANCE (feet)	SCREENED INTERVAL(S) (feet bgs)	CASING DIAMETER (inches)	STATUS	TYPE
Hickory and Banana Basins	600490	Fontana Water Company - F7a***	3330 upgradient	590-1000	18	Active	Municipal
	600660	California Speedway - Infield Well	2070 downgradient	NA	NA	Active	Industrial
	3601365	California Speedway 2	2780 downgradient	451-455, 491-603, & 664-780	20	Active	Industrial
	3600371	Reliant Energy - East Well	4070 downgradient	434-467, 500-513, 553-580, 593-652, & 825-847	20	Active	Industrial
	3602267	City Of Ontario - 20	14500 downgradient	NA	20	Active	Municipal
	601001	Inland Empire Utilities Agency - BH-1/1	340 downgradient	365-405	4	Active	Monitoring
	601002	Inland Empire Utilities Agency - BH-1/2	340 downgradient	435-475	4	Active	Monitoring
Turner Basins	3600010	City Of Ontario - 25	2530 crossgradient	370-903	20	Inactive	Municipal
	600453	City Of Ontario - 29	2810 downgradient	400-1095	18	Active	Municipal
	600585	City of Ontario - 38*	4600 crossgradient	500-1010	16	Active	Municipal
	600997	Inland Empire Utilities Agency - TRN-1/1	50 downgradient	340-360	4	Active	Monitoring
	600998	Inland Empire Utilities Agency - TRN-1/2	50 downgradient	380-400	4	Active	Monitoring
	600999	Inland Empire Utilities Agency - TRN-2/1	50 downgradient	350-370	4	Active	Monitoring
	601000	Inland Empire Utilities Agency - TRN-2/2	50 downgradient	392-412	4	Active	Monitoring
Declaz Basin	300208	Jurupa Community Services District - 19	8900 downgradient	230-390	18	Active	Municipal
	300207	Jurupa Community Services District - 17	5240 downgradient	259-290, & 300-400	NA	Active	Municipal
	300200	Jurupa Community Services District - 13	5730 downgradient	220-446	16-34	Active	Municipal
	300484	Inland Empire Utilities Agency - DCZ-1	50 downgradient	155-175	4	Active	Monitoring
	--	Inland Empire Utilities Agency - DCZ-2	4,100 downgradient	240-270	4	Active	Monitoring
RP-3 Basins	600492	Fontana Water Company - F23a	7900 upgradient	450-740	18	Active	Municipal
	600477	Inland Empire Utilities Agency - Southridge JHS	5500 downgradient	NA	NA	Active	Monitoring
	600848	Alcoa - Offsite MW1	9480 downgradient	NA	NA	Active	Monitoring
	600850	Alcoa - Offsite MW3	4725 downgradient	NA	NA	Active	Monitoring
	601040	Inland Empire Utilities Agency - RP3-1/1	100 downgradient	215-235	4	Active	Monitoring
	601041	Inland Empire Utilities Agency - RP3-1/2	100 downgradient	265-285	4	Active	Monitoring
Jurupa Basin	Not currently planned for recharge						
7th & 8th Street Basins	3601561	San Antonio Water Company No. 12	740 downgradient	379-480, 525-563, 578-609, & 634-679	16	Inactive	Municipal
	3601772	City of Ontario No. 4	3429 downgradient	526-910	16-20	Inactive	Municipal
	--	City of Ontario No. 51	3402 downgradient	Not Yet Constructed	NA	NA	Municipal
	600493	City of Ontario No. 35	9695 downgradient	580-1020	18-36	Active	Municipal
	601036	Inland Empire Utilities Agency - 8TH-1/1	150 downgradient	495-535	4	Active	Monitoring
	601037	Inland Empire Utilities Agency - 8TH-1/2	150 downgradient	595-645	4	Active	Monitoring
	601038	Inland Empire Utilities Agency - 8TH-2/1	2460 downgradient	465-505	4	Active	Monitoring
601039	Inland Empire Utilities Agency - 8TH-2/2	2460 downgradient	576-616	4	Active	Monitoring	
Brooks Basins	1901719	City of Pomona P-10	1983 downgradient	295-784	20	Active	Municipal
	1901713	City of Pomona P-04	2620 downgradient	254-338, & 403-452	NA	Inactive	Municipal
	1904001	City of Pomona P-34	2550 downgradient	363-367, 380-400, 419-427	20	Active	Municipal
	1903156	City of Pomona P-30	2160 crossgradient	565-875	20	Inactive	Municipal
	1903016	City of Pomona P-2	3455 downgradient	NA	NA	Active	Municipal
	1901725	City of Pomona P-17	4500 downgradient	454-536	20	Inactive	Municipal
	601050	Inland Empire Utilities Agency - BRK-1/1	144 downgradient	310-350	4	Active	Monitoring
	601051	Inland Empire Utilities Agency - BRK-1/2	144 downgradient	520-560	4	Active	Monitoring
	601048	Inland Empire Utilities Agency - BRK-2/1	1305 downgradient	320-360	4	Active	Monitoring
601049	Inland Empire Utilities Agency - BRK-2/2	1305 downgradient	560-600	4	Active	Monitoring	
San Seavaine Basins	600905	Cucamonga Valley Water District No. 39	8300-13170 downgradient	750-870, 940-960, 970-1060, & 1080-1130,	20	Active	Municipal
	601115	Inland Empire Utilities Agency - SS-1/1	~39-116 downgradient	640-680	4	Active	Monitoring
	--	Inland Empire Utilities Agency - SSV-2	200 downgradient	370-395	4	Active	Monitoring
	600576	Unitex IRR	~ 1338 downgradient	NA	NA	NA	Private Irrigation
	600462	Unitex 91090	~1601 downgradient	NA	NA	Active	Private Domestic
600369	Unitex CalDOT	~ 2850 downgradient	400-684	NA	NA	Irrigation	
Victoria Basin	600905	Cucamonga Valley Water District No. 39	4329 downgradient	750-870, 940-960, 970-1060, & 1080-1130,	20	Active	Municipal
	601033	Cucamonga Valley Water District No. 43**	8300 downgradient	650-800	32-42	Active	Municipal
	601117	Inland Empire Utilities Agency - VCT-1/1 and 1/2	~39-116 downgradient	570-610	4	Active	Monitoring
	--	Inland Empire Utilities Agency - VCT-1/1 and 1/2	~ 2000 downgradient	570-610	4	Active	Monitoring
Ely Basin	601003	Ely Basin MW-1, Philadelphia Well (Casing 3)	100 downgradient	280 - 300	2	Active	Monitoring
	601004	Ely Basin MW-2, Walnut Well (Casing 2)	3050 downgradient	290 - 310	4	Active	Monitoring
	3600975	Riverside Drive Well (43840-CWW)	6046 downgradient	NA	NA	Active	Private Irrigation
	600134	Bishop Of San Bernardino Corp. - DOM	6500 downgradient	NA	NA	Active	Private Domestic

Notes:

- NA = Data not available
- CBWM ID = Chino Basin Water Master well identification number
- bgs = below ground surface
- \* = Ontario Well No. 38 replaced Ontario Well No. 19, which is inactive
- \*\* = Cucamonga Valley Water District No. 43 replaced CVWD Well Nos. 35 & 36, which are inactive.
- \*\*\* = Fontana Water Company Well 7A replaced Fontana Water Company Well 37A (1Q18)

Table 2-3  
 Recycled Water Monitoring: Primary & Secondary Maximum Contaminant Levels  
 (Recycled Water Quality Specifications A.1, A.2, A.3, & A.15)

Constituent	2Q18	3Q18	4Q18	1Q19	4Q Run. Avg. <sup>1</sup>	Limit	Unit	Method
Inorganic Chemicals								
Aluminum	80	32	72	96	70	1000	µg/L	EPA 200.8
Antimony	<1	<1	<1	<1	<1	6	µg/L	EPA 200.8
Arsenic	<2	<2	<1	<2	<2	10	µg/L	EPA 200.8
Asbestos	<0.2	<0.2	<0.2	<0.16	<0.2	7	MFL	EPA 100.2
Barium	12	18	15	14	15	1000	µg/L	EPA 200.8
Beryllium	<0.5	<0.5	<1	<0.5	<1	4	µg/L	EPA 200.8
Cadmium	<0.25	<0.25	<0.5	<0.25	<0.5	5	µg/L	EPA 200.8
Chromium	1.4	1.8	<1	1.9	1.5	50	µg/L	EPA 200.8
Chromium VI <sup>2</sup>	0.20	0.36	0.28	0.24	0.27	10	µg/L	EPA 218.6
Cyanide	<20	<20	<25	<20	<25	150	µg/L	SM 4500-CN E
Fluoride	0.2	0.2	0.2	0.2	0.2	2	mg/L	SM 4500-F C
Mercury	<0.5	<0.5	<0.2	<0.5	<0.5	2	µg/L	EPA 245.2
Nickel	3	3	<5	2	<5	100	µg/L	EPA 200.8
Perchlorate	<4	<4	<4	<4	<4	6	µg/L	EPA 314/331.0
Selenium	<2	<2	<5	<2	<5	50	µg/L	EPA 200.8
Thallium	<1	<1	<1	<1	<1	2	µg/L	EPA 200.8
Volatile Organic Chemicals (VOCs)								
Benzene	<0.5	<0.5	<0.5	<0.5	<0.5	1	µg/L	EPA 524.2
Carbon Tetrachloride	<0.5	<0.5	<0.5	<0.5	<0.5	0.5	µg/L	EPA 524.2
1,2-Dichlorobenzene	<0.5	<0.5	<0.5	<0.5	<0.5	600	µg/L	EPA 524.2
1,4-Dichlorobenzene	<0.5	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
1,1-Dichloroethane	<0.5	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
1,2-Dichloroethane	<0.5	<0.5	<0.5	<0.5	<0.5	0.5	µg/L	EPA 524.2
1,1-Dichloroethylene	<0.5	<0.5	<0.5	<0.5	<0.5	6	µg/L	EPA 524.2
cis-1,2-Dichloroethylene	<0.5	<0.5	<0.5	<0.5	<0.5	6	µg/L	EPA 524.2
trans-1,2-Dichloroethylene	<0.5	<0.5	<0.5	<0.5	<0.5	10	µg/L	EPA 524.2
Dichloromethane	<0.5	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
1,2-Dichloropropane	<0.5	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
1,3-Dichloropropene	<0.5	<0.5	0.7	0.7	<0.5	0.5	µg/L	EPA 524.2
Ethylbenzene	<0.5	<0.5	<0.5	<0.5	<0.5	300	µg/L	EPA 524.2
Monochlorobenzene	<0.5	<0.5	<0.5	<0.5	<0.5	70	µg/L	EPA 524.2
Methyl-tert-butyl ether	<0.5	<0.5	<0.5	<0.5	<0.5	13	µg/L	EPA 524.2
Styrene	<0.5	<0.5	<0.5	<0.5	<0.5	100	µg/L	EPA 524.2
1,1,2,2-Tetrachloroethane	<0.5	<0.5	<0.5	<0.5	<0.5	1	µg/L	EPA 524.2
Tetrachloroethylene	<0.5	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
Toluene	<0.5	<0.5	<0.5	<0.5	<0.5	150	µg/L	EPA 524.2
1,2,4-Trichlorobenzene	<0.5	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
1,1,1-Trichloroethane	<0.5	<0.5	<0.5	<0.5	<0.5	200	µg/L	EPA 524.2
1,1,2-Trichloroethane	<0.5	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
Trichloroethylene	<0.5	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
Trichlorofluoromethane	<0.5	<0.5	<0.5	<0.5	<0.5	150	µg/L	EPA 524.2
1,1,2-Trichloro-1,2,2-Trifluoroethane	<0.5	<0.5	<0.5	<0.5	<0.5	1200	µg/L	EPA 524.2
Vinyl Chloride	<0.5	<0.5	<0.5	<0.5	<0.5	0.5	µg/L	EPA 524.2
m,p-Xylene	<0.5	<0.5	<0.5	<0.5	<0.5	1750 <sup>3</sup>	µg/L	EPA 524.2
o-Xylene	<0.5	<0.5	<0.5	<0.5	<0.5		µg/L	EPA 524.2
1,2,3-Trichloropropane (added 7/17) <sup>4</sup>	<0.005	0.007	<0.005	0.006	<0.005	0.005	µg/L	CASRL 524M-TCP
Non-Volatile Synthetic Organic Chemicals (SOCs)								
Alachlor (Alanex)	<0.1	<0.1	<0.1	<0.1	<0.1	2	µg/L	EPA 505
Atrazine	<0.05	<5	<5	<0.05	<0.05	1	µg/L	EPA 525.2
Bentazon	<0.5	<0.5	<0.5	<0.5	<0.5	18	µg/L	EPA 515.4
Benzo(a)pyrene	<0.02	<0.02	<0.02	<0.02	<0.02	0.2	µg/L	EPA 525.2
Carbofuran	<0.5	<0.5	<0.5	<0.5	<0.5	18	µg/L	EPA 531.2
Chlordane	<0.1	<0.1	<0.1	<0.1	<0.1	0.1	µg/L	EPA 505
2,4-D	<0.1	<0.1	<0.1	<0.1	<0.1	70	µg/L	EPA 515.4
Dalapon	6	8	5	8	7	200	µg/L	EPA 515.4
Dibromochloropropane	0.036	<0.01	<0.01	<0.01	<0.01	0.2	µg/L	EPA 504.1
Di(2-ethylhexyl)adipate	<0.6	<0.6	<0.6	<0.6	<0.6	400	µg/L	EPA 525.2
Di(2-ethylhexyl)phthalate	<0.6	<0.6	<0.6	2.4	<0.6	4	µg/L	EPA 525.2
Dinoseb	<0.2	<0.2	<0.2	<0.2	<0.2	7	µg/L	EPA 515.4
Diquat	<0.4	<0.4	<0.4	<0.4	<0.4	20	µg/L	EPA 549.2
Endothall	<5	<5	<5	<5	<5	100	µg/L	EPA 548.1
Endrin	<0.01	<0.01	<0.01	<0.01	<0.01	2	µg/L	EPA 505



Table 2-3  
Recycled Water Monitoring: Primary & Secondary Maximum Contaminant Levels  
(Recycled Water Quality Specifications A.1, A.2, A.3, & A.15)

Constituent	2Q18	3Q18	4Q18	1Q19	4Q Run. Avg. <sup>1</sup>	Limit	Unit	Method
Ethylene Dibromide	<0.01	<0.01	<0.01	<0.01	<0.01	0.05	µg/L	EPA 504.1
Glyphosate	<6	<6	<6	<6	<25	700	µg/L	EPA 547
Heptachlor	<0.01	<0.04	<0.04	<0.01	<0.01	0.01	µg/L	EPA 505
Heptachlor Epoxide	<0.01	<0.01	<0.01	<0.01	<0.01	0.01	µg/L	EPA 505
Hexachlorobenzene	<0.05	<0.05	<0.05	<0.05	<0.05	1	µg/L	EPA 525.2
Hexachlorocyclopentadiene	<0.05	0.05	<0.05	<0.05	<0.05	50	µg/L	EPA 525.2
Lindane	<0.01	<0.01	<0.01	<0.01	<0.01	0.2	µg/L	EPA 505
Methoxychlor	<0.05	<0.05	<0.05	<0.05	<0.05	30	µg/L	EPA 505
Molinate	<0.1	<0.1	<0.1	<0.1	<0.1	20	µg/L	EPA 525.2
Oxamyl	<0.5	<0.5	<0.5	<0.5	<0.5	50	µg/L	EPA 531.2
Pentachlorophenol	<0.04	<0.04	<0.04	<0.04	<0.04	1	µg/L	EPA 515.4
Picloram	<0.1	<0.1	<0.1	<0.1	<0.1	500	µg/L	EPA 515.4
PCB 1016	<0.08	<0.08	<0.08	<0.08	<0.08	0.5	µg/L	EPA 505
PCB 1221	<0.1	<0.1	<0.1	<0.1	<0.1	0.5	µg/L	EPA 505
PCB 1232	<0.1	<0.1	<0.1	<0.1	<0.1	0.5	µg/L	EPA 505
PCB 1242	<0.1	<0.1	<0.1	<0.1	<0.1	0.5	µg/L	EPA 505
PCB 1248	<0.1	<0.1	<0.1	<0.1	<0.1	0.5	µg/L	EPA 505
PCB 1254	<0.1	<0.1	<0.1	<0.1	<0.1	0.5	µg/L	EPA 505
PCB 1260	<0.1	<0.1	<0.1	<0.1	<0.1	0.5	µg/L	EPA 505
Simazine	<0.05	<0.05	<0.05	<0.05	<0.05	4	µg/L	EPA 525.2
Thiobencarb	<0.2	<0.2	<0.2	<0.2	<0.2	70	µg/L	EPA 525.2
Toxaphene	<0.5	<0.5	<0.5	<0.5	<0.5	3	µg/L	EPA 505
2,3,7,8-TCDD (Dioxin)	<5.12	<4.07	<5	<5	<5.12	30	pg/L	EPA 1613
2,4,5-TP (Silvex)	<0.2	<0.2	<0.2	<0.2	<0.2	50	µg/L	EPA 515.4
Action Level Chemicals								
Copper	4.8	4.0	2.0	6.1	4.2	1300	µg/L	EPA 200.8
Lead	<0.5	<0.5	<0.5	<0.5	<0.5	15	µg/L	EPA 200.8
Radionuclides								
Combined Radium-226 and Radium 228	<0.17	<0.16	0.28	<1	<0.39	5	pCi/L	EPA 903.0
Gross Alpha Particle Activity	<3	<3	<3	<3	<3	15	pCi/L	EPA 900.0/SM7110C
Tritium	<271	<344	<337	<387	<398	20,000	pCi/L	EPA 906
Strontium-90	<1.53	<1.04	<0.90	<3	<1.53	8	pCi/L	EPA 905
Gross Beta Particle Activity	14	13	15	13	14	50	pCi/L	EPA 900.0
Uranium	<0.7	<0.7	<0.7	<0.7	<0.7	20	pCi/L	EPA 200.8
Secondary Maximum Contaminant Level Chemicals								
Aluminum	80	32	72	96	70	200	µg/L	EPA 200.8
Copper	4.8	4.0	2.0	6.1	4.2	1000	µg/L	EPA 200.8
Corrosivity <sup>5</sup>	-0.6 (Non-Cor.)	-0.2 (Non-Cor.)	0.3 (Non-Cor.)	-0.6 (Non-Cor.)	Non-Cor.	Non-Cor.	SI	SM 2330B
Foaming Agents (MBAS) <sup>5</sup>	<0.1	<0.1	<0.1	NR	<0.1	0.5	mg/L	S5540C/EPA 425.1
Iron <sup>5</sup>	NR	NR	63	NR	47	300	µg/L	EPA 200.7
Manganese	21	14	9	16	15	50	µg/L	EPA 200.8
Methyl-tert-butyl ether (MTBE) <sup>5</sup>	<0.5	<0.5	<0.5	<0.5	<0.5	5	µg/L	EPA 524.2
Odor--Threshold <sup>5</sup>	2	40	8	8	15	3	TON	SM 2150B
Silver	<0.25	<0.25	NR	<0.25	<0.25	100	µg/L	EPA 200.8
Thiobencarb	<0.2	<0.2	<0.2	<0.2	<0.5	1	µg/L	EPA 525.2
Zinc	32	35	54	56	44	5000	µg/L	EPA 200.8
Miscellaneous Regulated Constituents								
Oil & Grease <sup>6</sup>	<1	<1	2	<1	<1	1	mg/L	EPA 1664
Disinfection Byproducts								
Bromate	1	1	<1	<1	1	10	µg/L	EPA 300.1/317
Chlorite	<0.01	<0.01	<0.01	<0.01	<0.01	1	mg/L	EPA 300.0
	BRK-LYS-25	DCZ2-LYS-25	DCZ2-LYS-25	BRK-LYS-25	<==TTHMs			
	BRK-LYS-25	DCZ2-LYS-25	DCZ2-LYS-25	BRK-LYS-25	<==HAA5			
	BRK-LYS-25	DCZ2-LYS-25	DCZ2-LYS-25		<==1,2,3-TCP			
Alternative Compliance Point Data	2Q18	3Q18	4Q18	1Q19				
Total Trihalomethanes (TTHMs)	<2	<2	<2	<2	<2	80	µg/L	EPA 524.2/624
Total Haloacetic Acids (HAA5)	<2	<2	<2	22	<2	60	µg/L	S6251B
1,2,3-Trichloropropane (added 7/17) <sup>4</sup>	<0.005	<0.005	<0.005	--	<0.005	0.005	µg/L	CASRL 524M-TCP

NR: Not required this quarter

<sup>1</sup> 4-quarter running average is calculated based on ND values equal to half the detection limit. The reported 4-quarter running average value, if less than DL, will be based on highest DL found in the data set.

<sup>2</sup> As of September 11, 2017 the MCL for hexavalent chromium that was established in 2014 is no longer in effect; the State Board does plan on establishing a new MCL in the near future.

<sup>3</sup> The sum of m,p-Xylene and o-Xylene is used to calculate compliance for the Total Xylenes limit

<sup>4</sup> 1,2,3-Trichloropropane compliance is based on a 4-quarter running average of lysimeter samples collected prior to reaching the groundwater table

<sup>5</sup> 4-quarter running average is calculated based on the four most recent results. Monitoring is required annually. However, if monitoring takes place more frequently than required, those results will be reported.

<sup>6</sup> Oil & Grease compliance determination not based on 4-quarter running average

**Bold signifies an exceedance of a limit in the Order. Explained in further detail in the report text.**

Table 2-9  
Groundwater Monitoring Well Results (Quarterly)

Sample Location	Date	TOC (mg/L)	Total Calcium (MPW/100mL)	pH	EC (µmho/cm)	Al (µg/L)	Color (units)	Cu (µg/L)	Corrosivity Index (SI)	Foaming Agents (mg/L)	Fe (µg/L)	Mn (µg/L)	MTBE (µg/L)	Odor Threshold (TON)	Ag (µg/L)	Thiocyanate (µg/L)	Turbidity (NTU)	Zn (µg/L)	TDS (mg/L)	Cl (mg/L)	Hardness (mg CaCO <sub>3</sub> /L)	Na (mg/L)	SO <sub>4</sub> (mg/L)	Nitrogen, Total (mg/L)	NO <sub>2</sub> -N (mg/L)	NO <sub>3</sub> -N (mg/L)	Dissolved Oxygen (mg/L)	
Banana & Hickory	Fontana Water Co. - F7a	03/06/19	<0.10	<1.1	7.4	361	<20	<3	<2	-0.2	<0.1	<20	<2	<0.5	2	0.52	<0.2	0.3	<20	246	10	152	18	14	4.9	<0.05	4.9	11.0
	California Speedway - Infield Well	02/21/19	0.39	<1.1	7.6	733	<20	<3	<2	0.3	<0.1	189	<2	<0.5	<1	<0.5	<0.2	0.8	<20	464	62	298	27	87	9.4	<0.05	9.4	4.8
	California Speedway 2	02/21/19	<0.10	<1.1	7.6	488	<20	<3	<2	0.2	<0.1	<20	<2	<0.5	<1	<0.5	<0.2	0.3	<20	296	25	195	20	35	6.8	<0.05	6.8	5.4
	BH-1/2*	03/07/19	0.30	28	7.7	582	<20	5	<2	0.2	<0.1	<20	<2	<0.5	2	<0.5	<0.2	0.4	<20	378	72	234	27	41	2.2	<0.05	2.2	6.5
Turner	Ontario Well No. 38	03/13/19	<0.10	<1.1	7.6	348	<20	<3	<2	0.1	<0.1	<20	<2	<0.5	<1	<0.5	<0.2	0.5	<20	220	9	143	19	9	2.4	<0.05	2.4	5.5
	T-1/2*	03/05/19	0.35	<1.1	7.3	721	<20	<3	2.0	0.0	<0.1	<20	<2	<0.5	1	<0.5	<0.2	0.9	<20	442	107	237	57	21	<0.6	<0.05	<0.1	2.7
	T-2/1*	03/04/19	0.70	<1.1	7.4	661	<20	25	2.0	-0.5	<0.1	<20	5	<0.5	1	<0.5	<0.2	33.0	<20	406	110	206	55	26	0.7	<0.05	0.7	1.0
	T-2/2*	03/04/19	0.55	<1.1	7.4	646	<20	<3	<2	-0.3	<0.1	<20	<2	<0.5	<1	<0.5	<0.2	1.0	<20	404	106	191	50	35	1.5	<0.05	1.5	1.7
RP3	Fontana Water Co. - F23a	03/06/19	<0.10	<1.1	7.4	434	<20	<3	<2	-0.1	<0.1	<20	<2	<0.5	1	<0.5	<0.2	0.3	<20	290	26	176	20	26	9.1	<0.05	9.1	11.2
	Southridge JHS*	03/19/19	0.84	<1.1	7.0	961	<20	5	3.5	-0.1	<0.1	27	4	<0.5	<1	<0.5	<0.2	10.2	<20	604	94	340	61	74	14.8	<0.05	14.8	3.3
	Alcoa MW1*	03/14/19	0.39	<1.1	7.2	646	<20	<3	<2	0.0	<0.1	<20	<2	<0.5	<1	<0.5	<0.2	0.7	<20	442	36	251	30	45	17.3	<0.05	17.3	9.0
	Alcoa MW3*	03/19/19	0.59	<1.1	7.1	1210	<20	<3	<2	0.1	<0.1	<20	<2	<0.5	<1	<0.5	<0.2	0.1	<20	846	174	456	53	60	21.5	<0.05	21.5	6.9
RP3-1/1*	03/20/19	0.87	78	7.1	605	<20	<3	2.4	-0.5	<0.1	<20	49	<0.5	2	<0.5	<0.2	1.4	<20	364	79	144	65	31	1.8	<0.05	1.8	2.8	
8th Street	8TH-1/1*	03/08/19	0.36	<1.1	7.4	423	<20	<3	<2	-0.4	<0.1	<20	3	<0.5	1	<0.5	<0.2	0.9	<20	286	63	173	11	24	1.9	<0.05	1.9	5.1
	8TH-1/2*	03/12/19	<0.10	<1.1	7.5	437	<20	10	<2	-0.2	<0.1	<20	12	<0.5	2	<0.5	<0.2	3.0	<20	286	50	175	17	19	1.8	<0.05	1.8	3.2
	8TH-2/1*	02/27/19	<0.10	<1.1	7.3	593	<20	<3	<2	-0.1	<0.1	<20	<2	<0.5	1	<0.5	<0.2	0.1	<20	402	24	248	18	44	20.7	0.41	20.3	5.3
	8TH-2/2*	02/27/19	<0.10	<1.1	7.3	439	<20	<3	<2	-0.4	<0.1	45	5	<0.5	<1	<0.5	<0.2	1.5	<20	300	46	172	16	29	4.5	<0.05	4.5	5.2
Brooks	Pomona Well No. 34	03/11/19	<0.10	<1.1	7.5	532	<20	<3	<2	0.1	<0.1	<20	<2	<0.5	<1	<0.5	<0.2	0.2	<20	352	41	244	13	42	10.1	<0.05	10.1	12.1
	BRK-1/1*	03/06/19	0.32	<1.1	7.3	524	<20	5	<2	-0.3	<0.1	<20	2	<0.5	<1	<0.5	<0.2	4.7	<20	322	67	189	39	37	2.1	<0.05	2.1	4.8
	BRK-1/2*	03/06/19	<0.10	<1.1	7.4	612	<20	<3	<2	0.0	<0.1	<20	<2	<0.5	1	<0.5	<0.2	1.1	<20	398	27	282	16	53	22.9	<0.05	22.9	5.5
	BRK-2/1*	03/13/19	<0.10	<1.1	7.5	559	<20	25	<2	0.1	<0.1	<20	23	<0.5	1	<0.5	<0.2	75.1	<20	348	58	245	12	37	4.9	<0.05	4.9	2.6
BRK-2/2*	03/13/19	<0.10	3	7.9	337	<20	<3	<2	0.1	<0.1	<20	<2	<0.5	2	<0.5	<0.2	0.5	<20	218	7	95	35	20	6.7	<0.05	6.7	6.9	
Ely	Ely Basin MW2 Walnut St.*	03/18/19	<0.10	<1.1	7.2	963	<20	<3	<2	-0.1	<0.1	<20	4	<0.5	2	<0.5	<0.2	0.3	<20	608	72	420	34	64	19.2	1.84	17.4	5.5
	Riverside Well (43840-CWW)*	02/19/19	<0.10	<1.1	7.5	548	<20	<3	<2	0.1	<0.1	40	<2	<0.5	3	<0.5	<0.2	0.3	34	338	27	230	21	31	9.1	<0.05	9.1	3.8
	Bishop of SB Corp. - DOM	02/19/19	<0.10	<1.1	7.7	798	<20	5	2.3	0.5	<0.1	1212	13	<0.5	2	<0.5	<0.2	3	102	494	37	356	24	63	19.8	<0.05	19.8	6.4
Victoria & San Sevaine	SS-1/1*	03/04/19	<0.10	<1.1	7.1	315	<20	5	<2	-0.9	<0.1	<20	<2	<0.5	2	<0.5	<0.2	2.5	<20	220	27	109	17	20	3.0	<0.05	3.0	4.6
	SSV-2*	03/25/19	0.38	<1.1	7.3	322	<20	10	<2	-0.6	<0.1	<20	<2	<0.5	1	<0.5	<0.2	14.0	<20	226	35	110	29	19	1.0	<0.05	1.0	4.7
	VCT-1/1*	03/07/19	0.30	<1.1	7.0	571	<20	10	<2	0.0	<0.1	<20	<2	<0.5	2	<0.5	<0.2	8.1	<20	394	78	0	<1	36	1.6	<0.05	1.6	4.9
	CVWD Well No. 39	02/20/19	<0.10	<1.1	7.4	293	<20	<3	<2	-0.4	<0.1	<20	<2	<0.5	2	<0.5	<0.2	0.3	<20	198	5	101	22	12	2.8	<0.05	2.1	4.2
	CVWD Well No. 43	02/20/19	<0.10	<1.1	7.6	345	<20	<3	<2	-0.1	<0.1	<20	<2	<0.5	<1	<0.5	<0.2	0.2	<20	226	9	134	19	15	3.9	<0.05	3.1	6.1
Unitex 91090	02/20/19	<0.10	<1.1	7.5	388	<20	<3	<2	-0.2	<0.1	<20	<2	<0.5	<1	<0.5	<0.2	0.2	<20	248	21	153	17	27	2.4	<0.05	2.4	5.2	
Declaz	JCSD Well No. 13	02/25/19	<0.10	<1.1	7.6	643	<20	<3	<2	0.1	<0.1	35	<2	<0.5	1	<0.5	<0.2	0.3	<20	412	106	222	31	14	2.0	<0.05	2.0	5.3
	JCSD Well No. 19	02/25/19	<0.10	<1.1	7.7	322	<20	<3	<2	0.0	<0.1	<20	<2	<0.5	2	<0.5	<0.2	0.4	<20	214	8	104	28	11	1.9	<0.05	1.9	4.6
	DCZ-1/1*	02/28/19	0.79	<1.1	7.5	501	<20	25	<2	-0.1	<0.1	26	<2	<0.5	2	<0.5	<0.2	15.6	<20	306	51	171	36	34	2.2	<0.05	2.2	1.9
	DCZ-2*	03/20/19	3.87	<1.1	7.6	495	<20	5	<2	0.0	<0.1	<20	<2	<0.5	1	0.66	<0.2	3.4	299	308	38	152	37	31	8.2	<0.05	8.2	4.4
	<b>Primary Maximum Contaminant Level</b>					1000		1300					13			70									1	10		
	<b>Secondary Maximum Contaminant Level</b>			6.5-8.5	900	200	15	1000		0.5	300	50	5	3	100	1	5	5000	500	250			250					

Blank cells indicate that analysis was not run for a constituent on that particular date. On certain dates, supplemental analysis was conducted on several monitoring wells. On those occasions, a full set of analysis was not necessary and only parameters of interest were analyzed.

\* Total dissolved metals reported for these wells. The remaining wells report total recoverable metals values.

Table 3-1  
Diluent & Recycled Water Recharge Volume (Acre-Feet)

Date	Diluent Water																				Recycled Water									
	Imported Water										Local Runoff / Storm Flow																			
	7th & 8th St.	Banana	Brooks	Declez	Ely	Hickory	RP3	San Sevaïne	Turner	Victoria	7th & 8th St.	Banana	Brooks	Declez	Ely	Hickory	RP3	San Sevaïne	Turner	Victoria	7th & 8th St.	Banana	Brooks	Declez	Ely	Hickory	RP3	San Sevaïne	Turner	Victoria
Apr-18	0	0	0	0	0	0	0	0	0	0	12	0	2	18	19	10	30	0	10	3	0	180	38	58	161	193	295	0	180	0
May-18	0	0	0	0	0	0	0	0	0	0	7	0	3	30	0	0	9	4	40	0	7	169	89	307	313	139	253	0	172	0
Jun-18	62	0	0	0	0	0	0	0	0	0	6	0	2	17	0	2	1	0	16	0	0	135	114	249	236	96	261	0	231	0
<b>2Q18 Total</b>	<b>62</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>25</b>	<b>0</b>	<b>7</b>	<b>65</b>	<b>19</b>	<b>12</b>	<b>39</b>	<b>4</b>	<b>66</b>	<b>3</b>	<b>7</b>	<b>484</b>	<b>240</b>	<b>614</b>	<b>710</b>	<b>428</b>	<b>808</b>	<b>0</b>	<b>583</b>	<b>0</b>
Jul-18	60	0	0	0	0	0	0	0	0	0	6	2	0	11	0	3	41	2	16	0	97	153	47	278	218	19	162	0	97	105
Aug-18	0	0	0	0	0	0	0	0	0	0	6	0	0	9	0	2	9	0	9	0	153	17	19	287	264	127	165	0	165	199
Sep-18	0	0	0	0	0	0	0	0	0	0	6	0	0	11	0	3	7	0	16	0	260	95	0	269	350	16	207	0	113	166
<b>3Q18 Total</b>	<b>60</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>18</b>	<b>2</b>	<b>0</b>	<b>31</b>	<b>0</b>	<b>8</b>	<b>57</b>	<b>2</b>	<b>41</b>	<b>0</b>	<b>511</b>	<b>265</b>	<b>66</b>	<b>834</b>	<b>833</b>	<b>162</b>	<b>534</b>	<b>0</b>	<b>375</b>	<b>470</b>
Oct-18	0	0	0	0	0	0	0	0	0	0	68	12	3	61	35	4	12	7	43	44	196	0	0	174	162	0	165	0	91	109
Nov-18	0	0	0	0	0	0	0	0	0	0	115	23	22	170	202	37	4	31	90	33	288	31	186	58	260	11	191	0	60	85
Dec-18	0	0	0	0	0	0	0	0	0	0	164	12	43	61	222	60	46	45	145	46	254	0	261	105	26	8	171	0	21	100
<b>4Q18 Total</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>347</b>	<b>47</b>	<b>68</b>	<b>292</b>	<b>460</b>	<b>101</b>	<b>62</b>	<b>84</b>	<b>278</b>	<b>122</b>	<b>738</b>	<b>31</b>	<b>447</b>	<b>338</b>	<b>449</b>	<b>18</b>	<b>527</b>	<b>0</b>	<b>171</b>	<b>293</b>
Jan-19	0	0	0	0	0	0	0	0	0	0	280	27	260	113	295	44	97	318	333	252	249	14	67	47	111	8	70	0	0	92
Feb-19	0	0	0	0	0	0	0	0	0	0	319	42	283	131	287	91	125	428	379	372	0	0	0	0	0	0	0	0	0	9
Mar-19	0	0	0	0	0	0	0	0	0	0	275	14	149	75	52	28	37	313	165	223	281	0	78	75	0	0	0	0	0	78
<b>1Q19 Total</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>874</b>	<b>83</b>	<b>692</b>	<b>318</b>	<b>635</b>	<b>162</b>	<b>259</b>	<b>1059</b>	<b>877</b>	<b>847</b>	<b>530</b>	<b>14</b>	<b>145</b>	<b>122</b>	<b>111</b>	<b>8</b>	<b>70</b>	<b>0</b>	<b>0</b>	<b>179</b>

Table 6-1  
 MVWD ASR Project - TIN/TDS Mass Balance

ASR Well No. 4										
	Date	Injection			Recovery			Mass Balance		
		Volume (AF)	TIN (mg/L)	TDS (mg/L)	Volume (AF)	TIN (mg/L)	TDS (mg/L)	Storage (AF)	TIN (kg)	TDS (kg)
2018	Apr-18	28.8	0.6	230	0	13.0	380	(1,449)	(24,960)	(689,442)
	May-18	38.6	0.6	230	3	13.0	380	(1,413)	(24,976)	(679,786)
	Jun-18	0.0	0.6	230	66	13.0	380	(1,479)	(26,030)	(710,596)
3Q18	Jul-18	0.0	0.6	230	112	13.0	380	(1,591)	(27,824)	(763,044)
	Aug-18	0.0	0.6	230	109	13.0	380	(1,700)	(29,580)	(814,362)
	Sep-18	0.0	0.6	230	104	13.0	380	(1,804)	(31,249)	(863,148)
4Q18	Oct-18	0.0	0.6	230	58	13.0	380	(1,862)	(32,177)	(890,277)
	Nov-18	0.0	0.6	230	0	13.0	380	(1,862)	(32,178)	(890,314)
	Dec-18	0.0	0.6	230	4	13.0	380	(1,867)	(32,247)	(892,344)
1Q19	Jan-19	0.0	0.6	230	0	13.0	380	(1,867)	(32,247)	(892,344)
	Feb-19	0.0	0.6	230	0	13.0	380	(1,867)	(32,247)	(892,344)
	Mar-19	0.0	0.6	230	0	13.0	380	(1,867)	(32,247)	(892,344)

ASR Well No. 30										
	Date	Injection			Recovery			Mass Balance		
		Volume (AF)	TIN (mg/L)	TDS (mg/L)	Volume (AF)	TIN (mg/L)	TDS (mg/L)	Storage (AF)	TIN (kg)	TDS (kg)
2018	Apr-18	99.5	0.6	230	61	12.0	320	701	(26,334)	(91,228)
	May-18	102.8	0.6	230	27	12.0	320	777	(26,656)	(72,694)
	Jun-18	0.0	0.6	230	244	12.0	320	533	(30,271)	(169,089)
3Q18	Jul-18	0.0	0.6	230	0	12.0	320	533	(30,271)	(169,089)
	Aug-18	0.0	0.6	230	48	12.0	320	485	(30,982)	(188,042)
	Sep-18	0.0	0.6	230	0	12.0	320	484	(30,985)	(188,113)
4Q18	Oct-18	0.0	0.6	230	0	12.0	320	484	(30,985)	(188,113)
	Nov-18	0.0	0.6	230	0	12.0	320	484	(30,985)	(188,113)
	Dec-18	0.0	0.6	230	71	12.0	320	413	(32,035)	(216,129)
1Q19	Jan-19	0.0	0.6	230	0	12.0	320	413	(32,035)	(216,129)
	Feb-19	0.0	0.6	230	0	12.0	320	413	(32,035)	(216,129)
	Mar-19	0.0	0.6	230	0	12.0	320	413	(32,035)	(216,129)

ASR Well No. 32										
	Date	Injection			Recovery			Mass Balance		
		Volume (AF)	TIN (mg/L)	TDS (mg/L)	Volume (AF)	TIN (mg/L)	TDS (mg/L)	Storage (AF)	TIN (kg)	TDS (kg)
2018	Apr-18	91.3	0.6	230	60	6.5	320	(3,425)	(43,404)	(771,432)
	May-18	94.2	0.6	230	28	6.5	320	(3,359)	(43,562)	(755,916)
	Jun-18	0.0	0.6	230	225	6.5	320	(3,584)	(45,366)	(844,697)
3Q18	Jul-18	0.0	0.6	230	0	6.5	320	(3,584)	(45,366)	(844,701)
	Aug-18	0.0	0.6	230	0	6.5	320	(3,584)	(45,366)	(844,701)
	Sep-18	0.0	0.6	230	0	6.5	320	(3,584)	(45,366)	(844,698)
4Q18	Oct-18	0.0	0.6	230	0	6.5	320	(3,584)	(45,366)	(844,698)
	Nov-18	0.0	0.6	230	0	6.5	320	(3,584)	(45,366)	(844,698)
	Dec-18	0.0	0.6	230	0	6.5	320	(3,584)	(45,366)	(844,695)
1Q19	Jan-19	0.0	0.6	230	0	6.5	320	(3,584)	(45,366)	(844,695)
	Feb-19	0.0	0.6	230	0	6.5	320	(3,584)	(45,366)	(844,695)
	Mar-19	0.0	0.6	230	0	6.5	320	(3,584)	(45,366)	(844,692)

The injected water is WFA-treated water, which meets CCR Title 22 drinking water standards.

Cells shaded in grey reflect most recent lab values.


Table 6-1  
 MVWD ASR Project - TIN/TDS Mass Balance

ASR Well No. 33										
	Date	Injection			Recovery			Mass Balance		
		Volume (AF)	TIN (mg/L)	TDS (mg/L)	Volume (AF)	TIN (mg/L)	TDS (mg/L)	Storage (AF)	TIN (kg)	TDS (kg)
2018	Apr-18	67.4	0.6	230	0	18.0	320	(2,966)	(79,558)	(1,357,468)
	May-18	71.2	0.6	230	0	18.0	320	(2,895)	(79,505)	(1,337,263)
	Jun-18	0.0	0.6	230	0	18.0	320	(2,895)	(79,505)	(1,337,260)
3Q18	Jul-18	0.0	0.6	230	0	18.0	320	(2,895)	(79,505)	(1,337,260)
	Aug-18	0.0	0.6	230	0	18.0	320	(2,895)	(79,505)	(1,337,260)
	Sep-18	0.0	0.6	230	0	18.0	320	(2,895)	(79,505)	(1,337,257)
4Q18	Oct-18	0.0	0.6	230	0	18.0	320	(2,895)	(79,505)	(1,337,257)
	Nov-18	0.0	0.6	230	5	18.0	320	(2,900)	(79,621)	(1,339,322)
	Dec-18	0.0	0.6	230	1	18.0	320	(2,901)	(79,640)	(1,339,658)
1Q19	Jan-19	0.0	0.6	230	0	18.0	320	(2,901)	(79,640)	(1,339,658)
	Feb-19	0.0	0.6	230	0	18.0	320	(2,901)	(79,640)	(1,339,658)
	Mar-19	0.0	0.6	230	0	18.0	320	(2,901)	(79,640)	(1,339,656)

The injected water is WFA-treated water, which meets CCR Title 22 drinking water standards.

Cells shaded in grey reflect most recent lab values.

Total Project (All Wells)						
	Date			Mass Balance		
				Storage (AF)	TIN (kg)	TDS (kg)
2Q18	Apr-18			(7,139)	(174,256)	(2,909,569)
	May-18			(6,890)	(174,699)	(2,845,659)
	Jun-18			(7,425)	(181,171)	(3,061,642)
3Q18	Jul-18			(7,537)	(182,966)	(3,114,093)
	Aug-18			(7,695)	(185,432)	(3,184,364)
	Sep-18			(7,799)	(187,104)	(3,233,216)
4Q18	Oct-18			(7,857)	(188,032)	(3,260,344)
	Nov-18			(7,862)	(188,149)	(3,262,446)
	Dec-18			(7,938)	(189,288)	(3,292,827)
1Q19	Jan-19			(7,938)	(189,288)	(3,292,827)
	Feb-19			(7,938)	(189,288)	(3,292,827)
	Mar-19			(7,938)	(189,288)	(3,292,821)

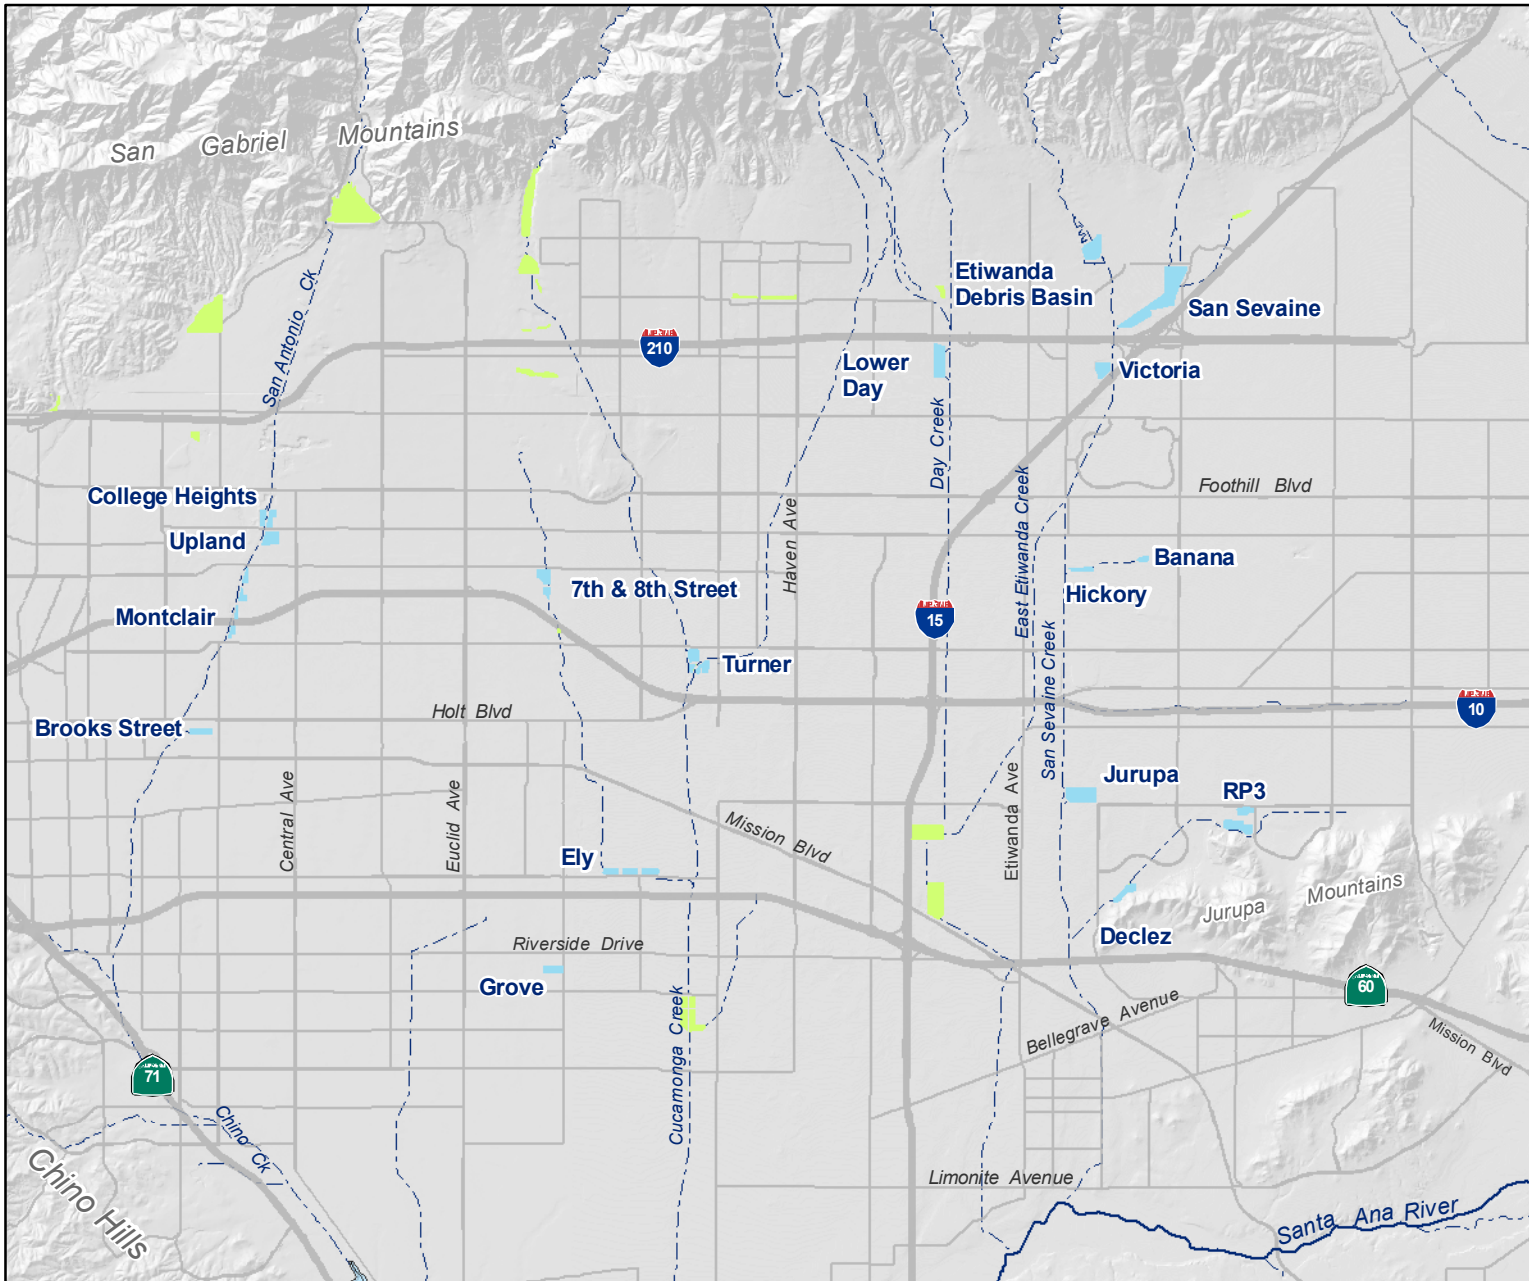


**Main Map Features**

- Recharge Basins in the Recycled Water Groundwater Recharge Program
- Non-Program Basins
- Rivers and Streams




**Chino Basin Recycled Water Groundwater Recharge Program**

*Basin Locations*





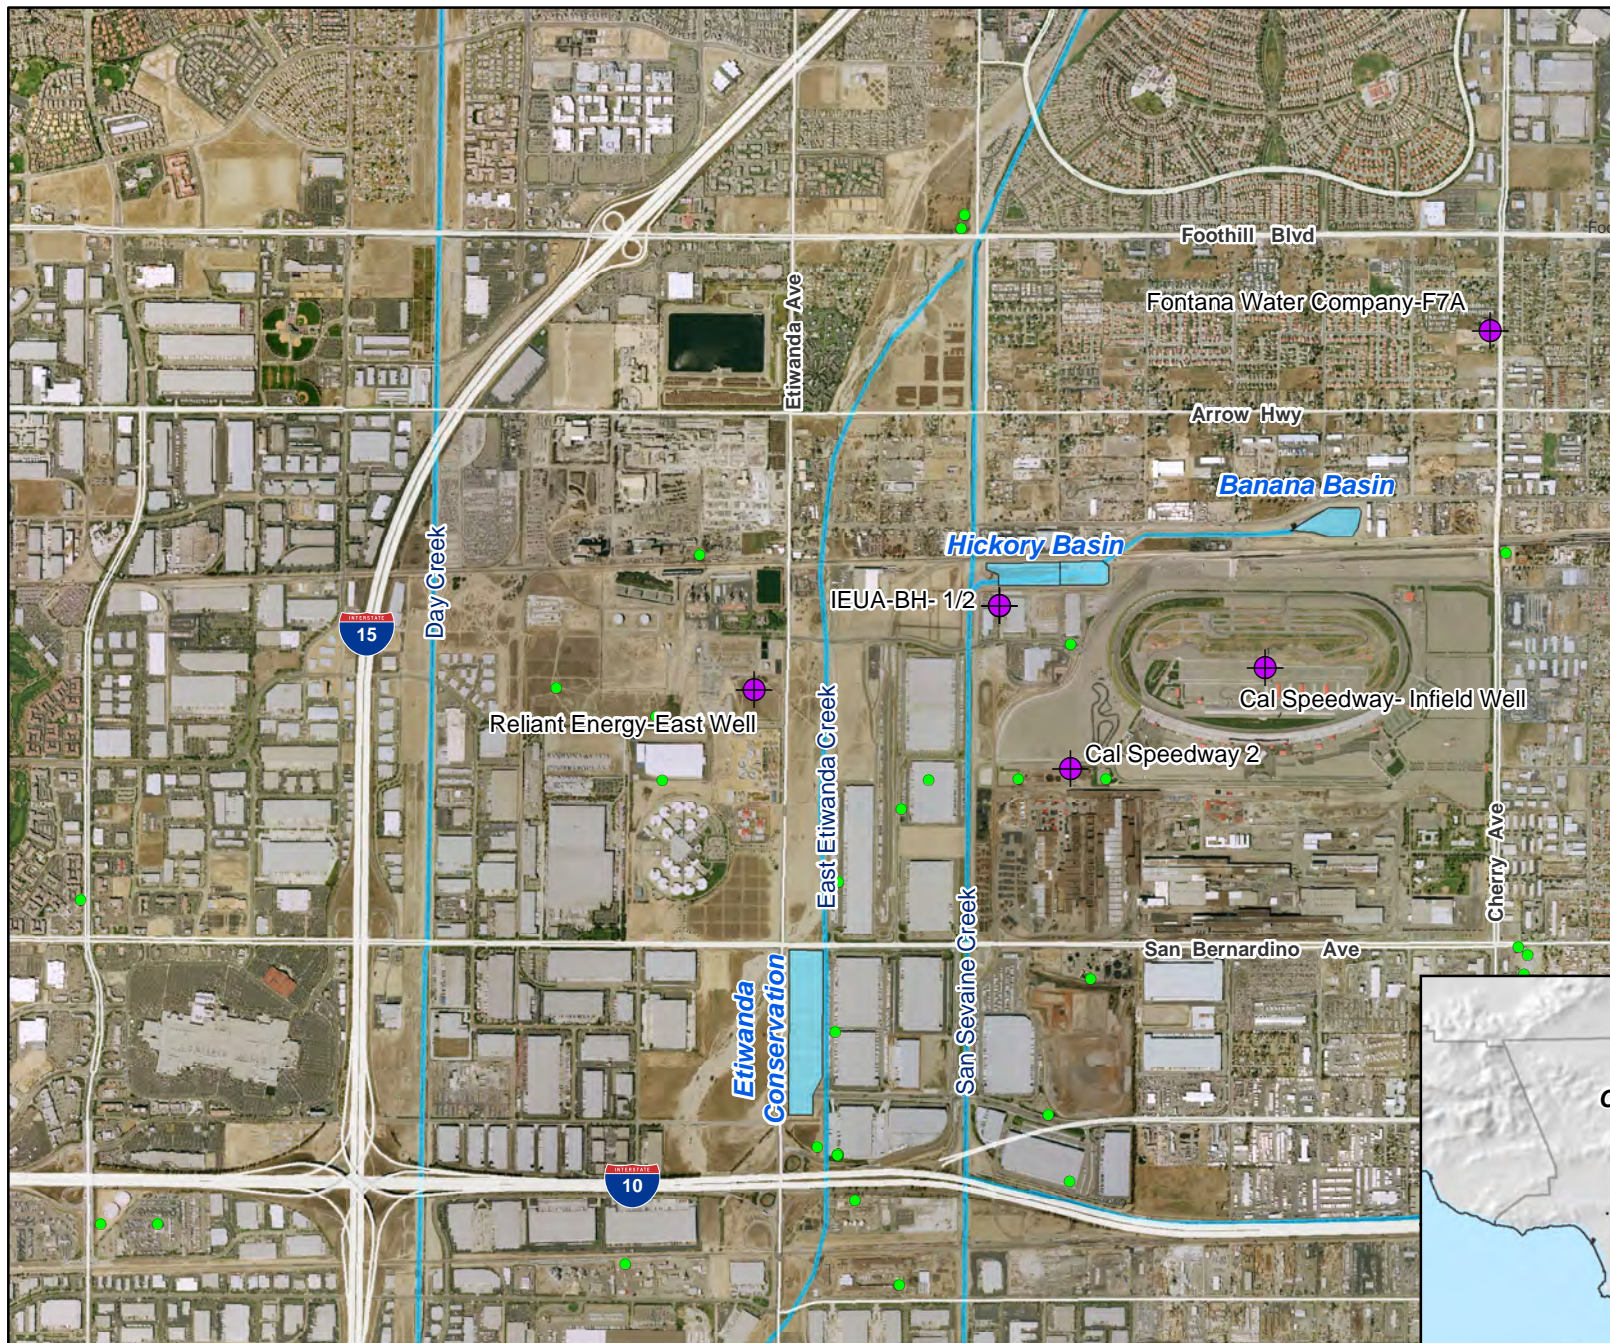

**Figure 1-1**





### Main Map Features


-  Existing Monitoring Well
-  "Other Wells"
-  Rivers/Streams/Creeks
-  Recharge Basins




**Monitoring Well Network**  
Hickory and Banana Basins

**Figure 2-1**





Recycled Water Recharge Program

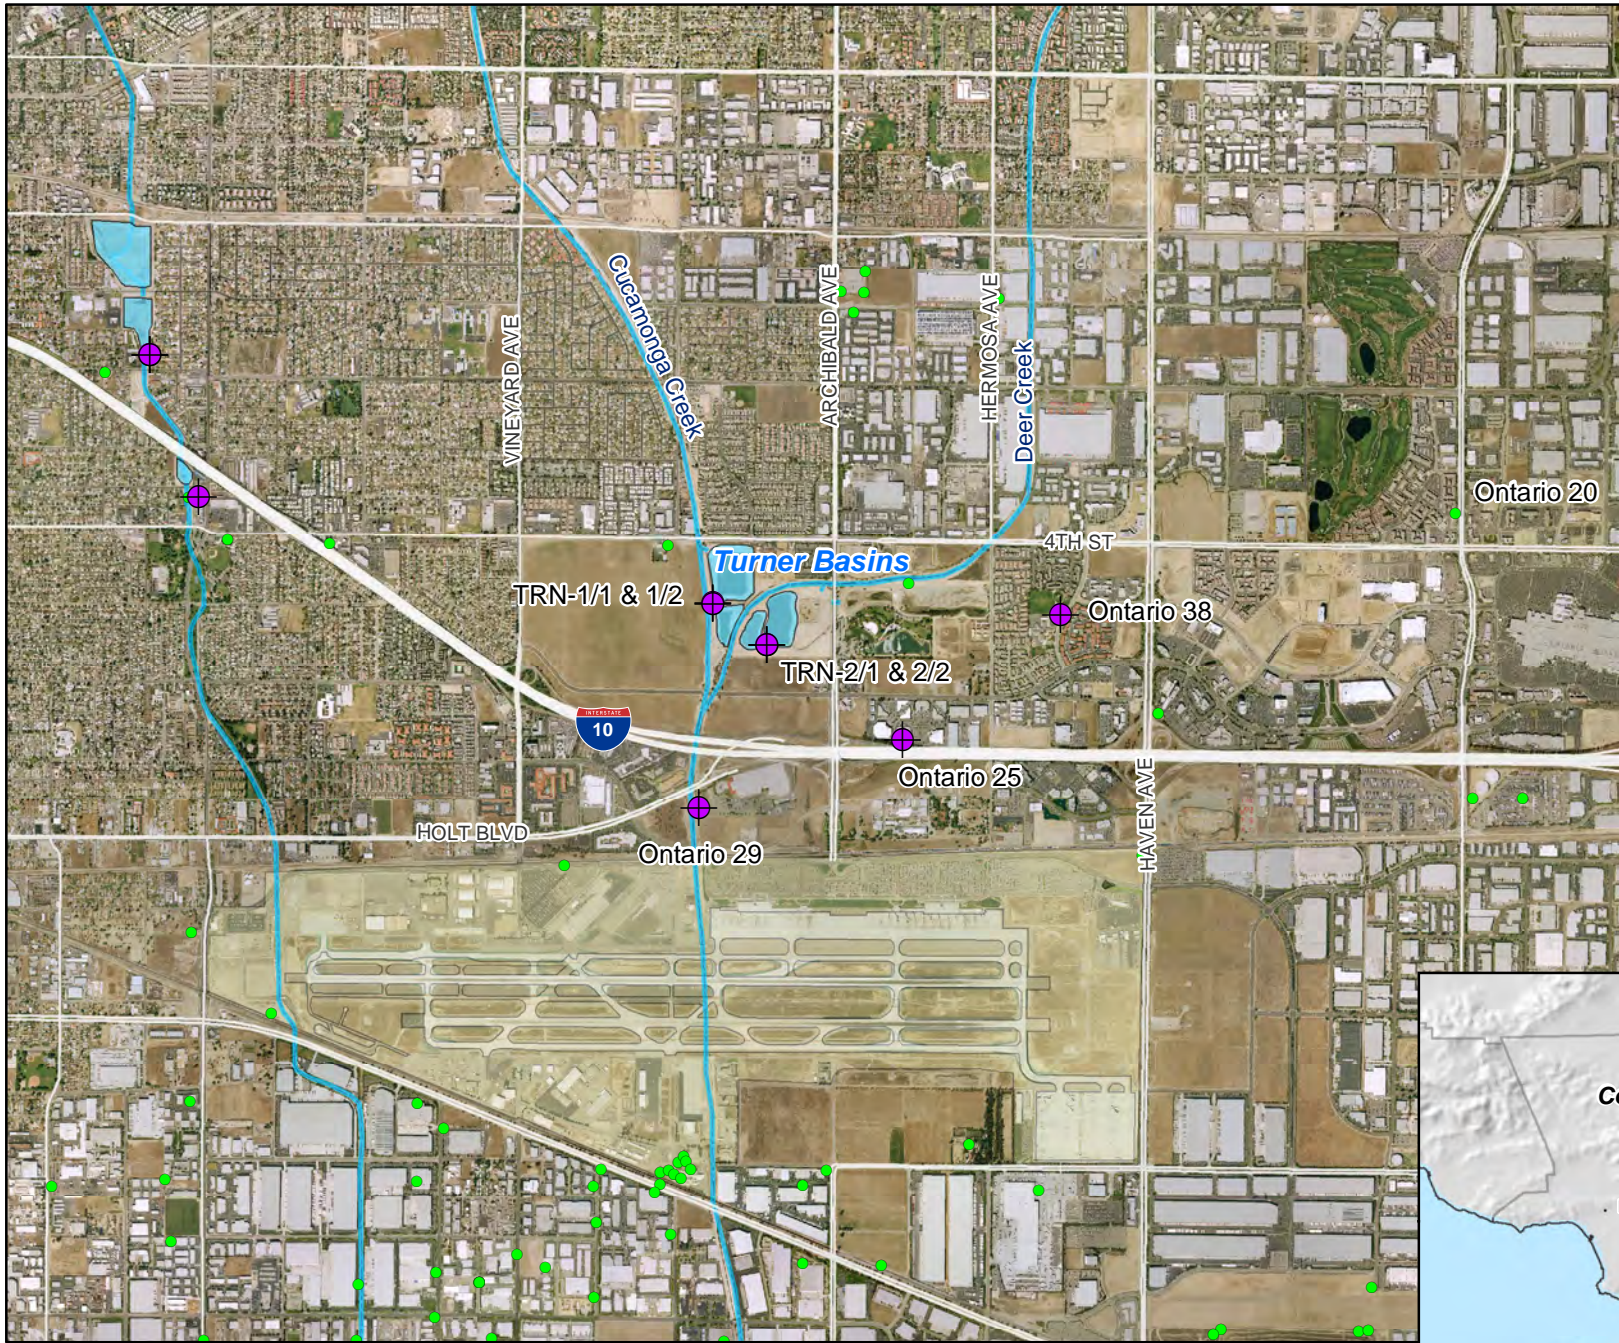





**Main Map Features**


-  Existing Monitoring Well
-  "Other Wells"
-  Rivers/Streams/Creeks
-  Recharge Basins




**Monitoring Well Network**  
Turner Basins

**Figure 2-2**





Recycled Water Recharge Program

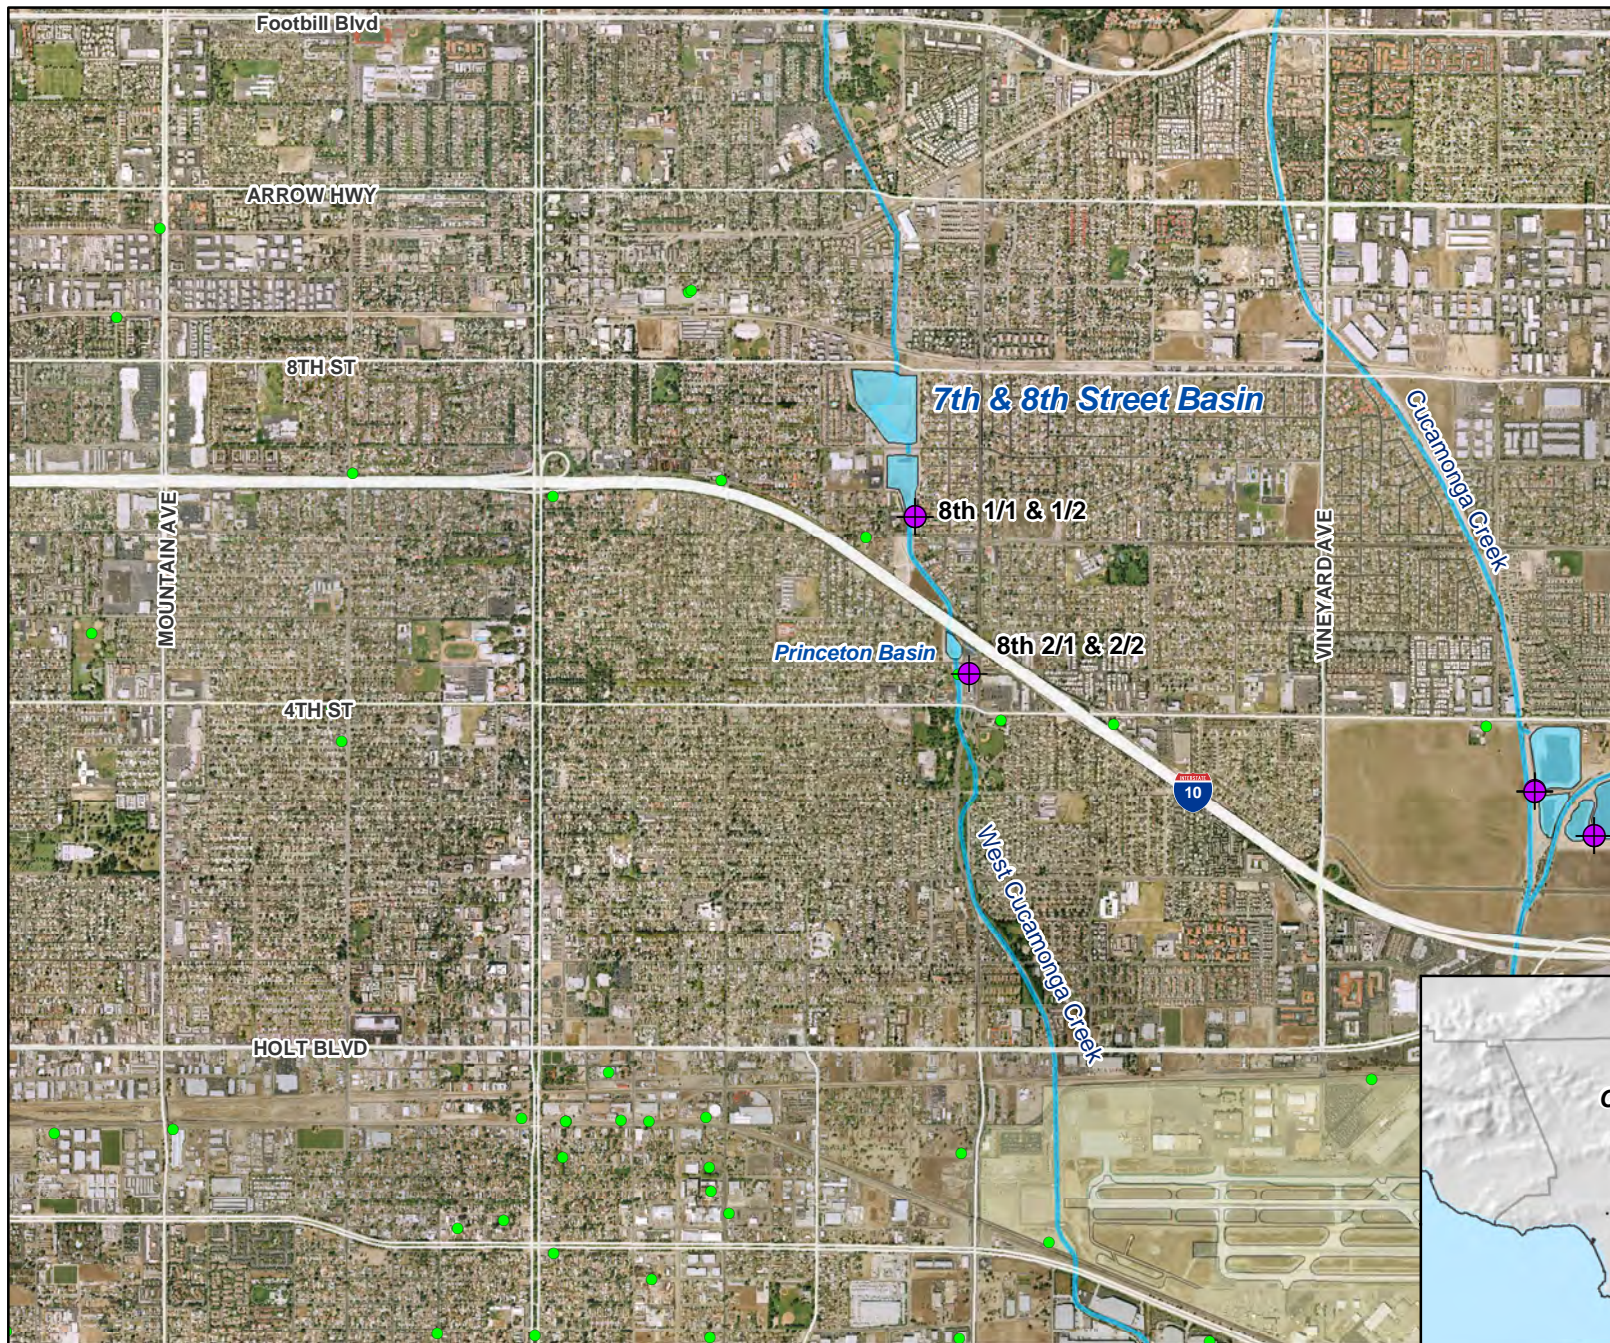





### Main Map Features

-  Existing Monitoring Well
-  "Other Wells"
-  Rivers/Streams/Creeks
-  Recharge Basins




**Monitoring Well Network**  
7th and 8th Street Basin

**Figure 2-3**





Recycled Water Recharge Program



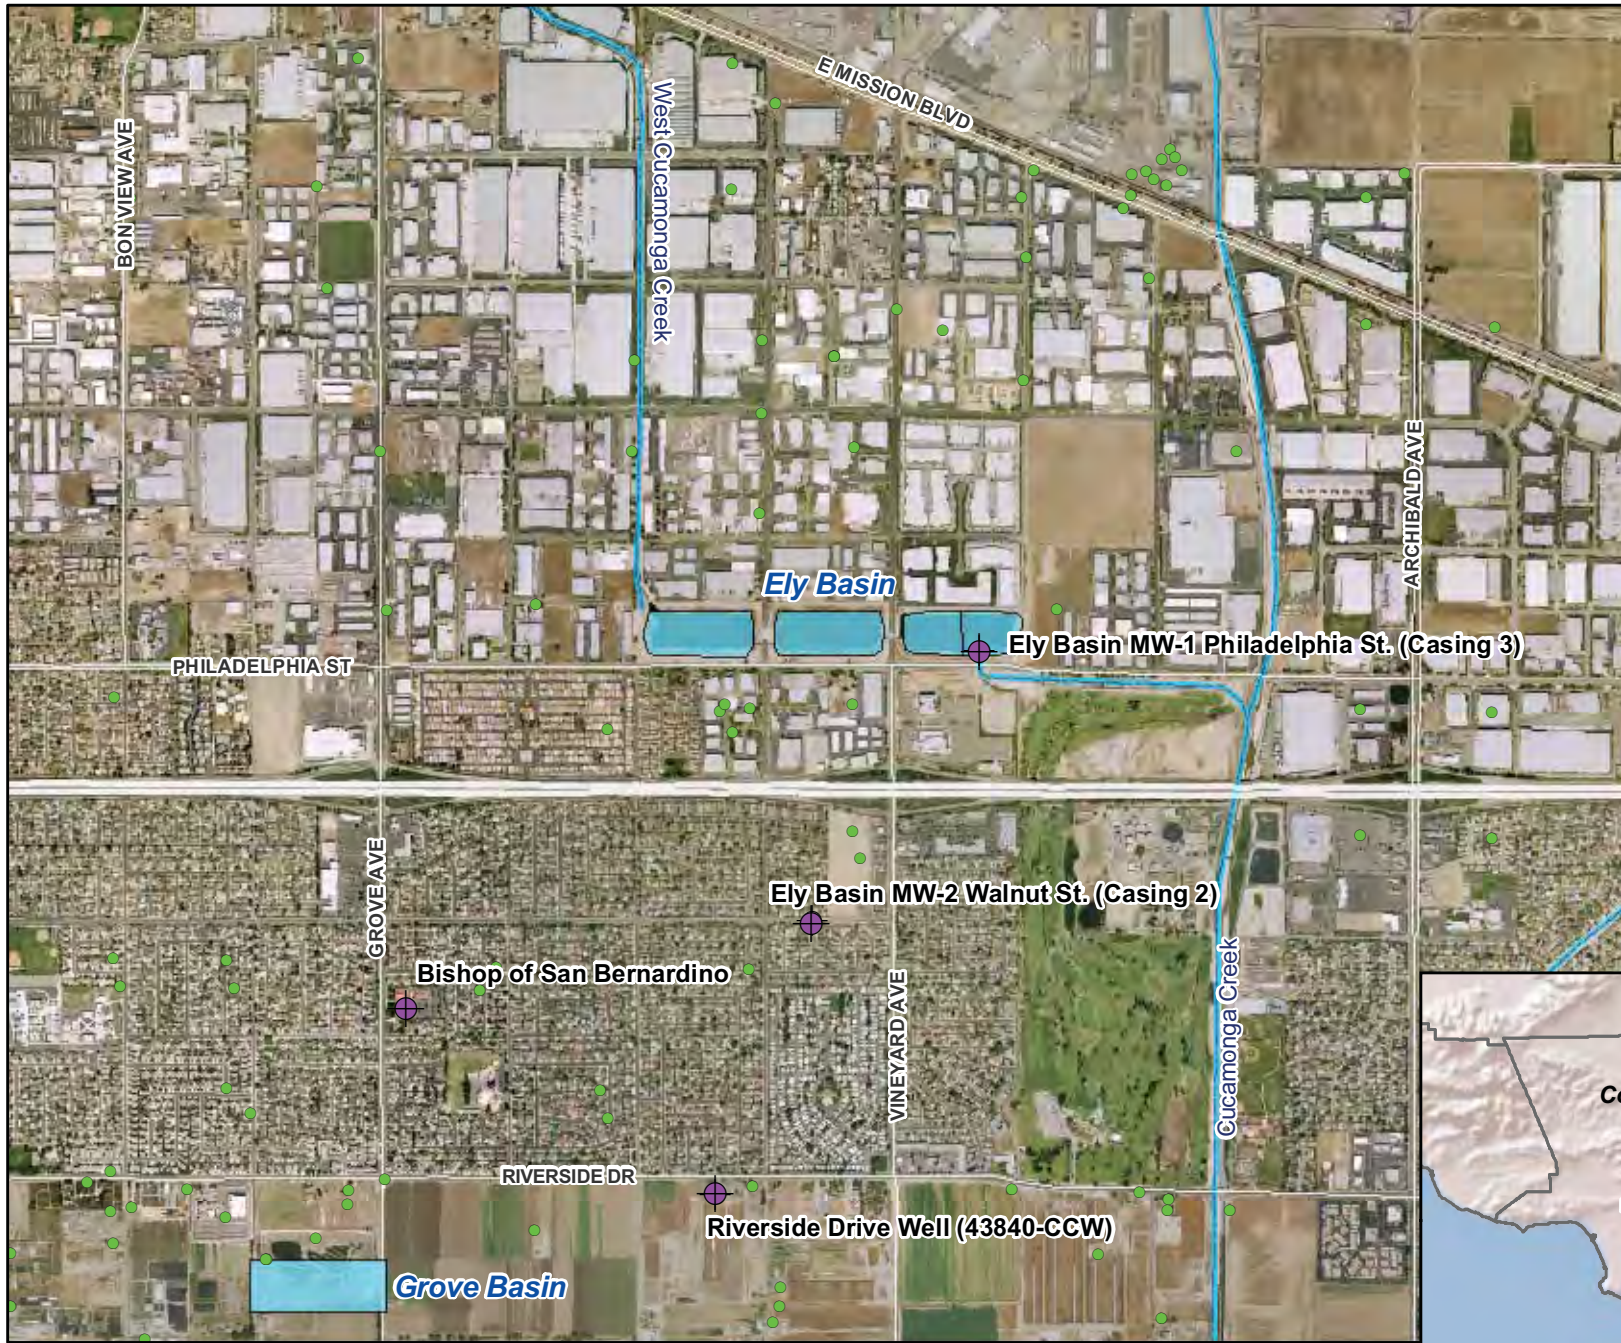



**Main Map Features**


-  Existing Monitoring Well
-  "Other Wells"
-  Rivers/Streams/Creeks
-  Recharge Basins




**Monitoring Well Network**  
Ely Basins

**Figure 2-4**





Recycled Water Recharge Program

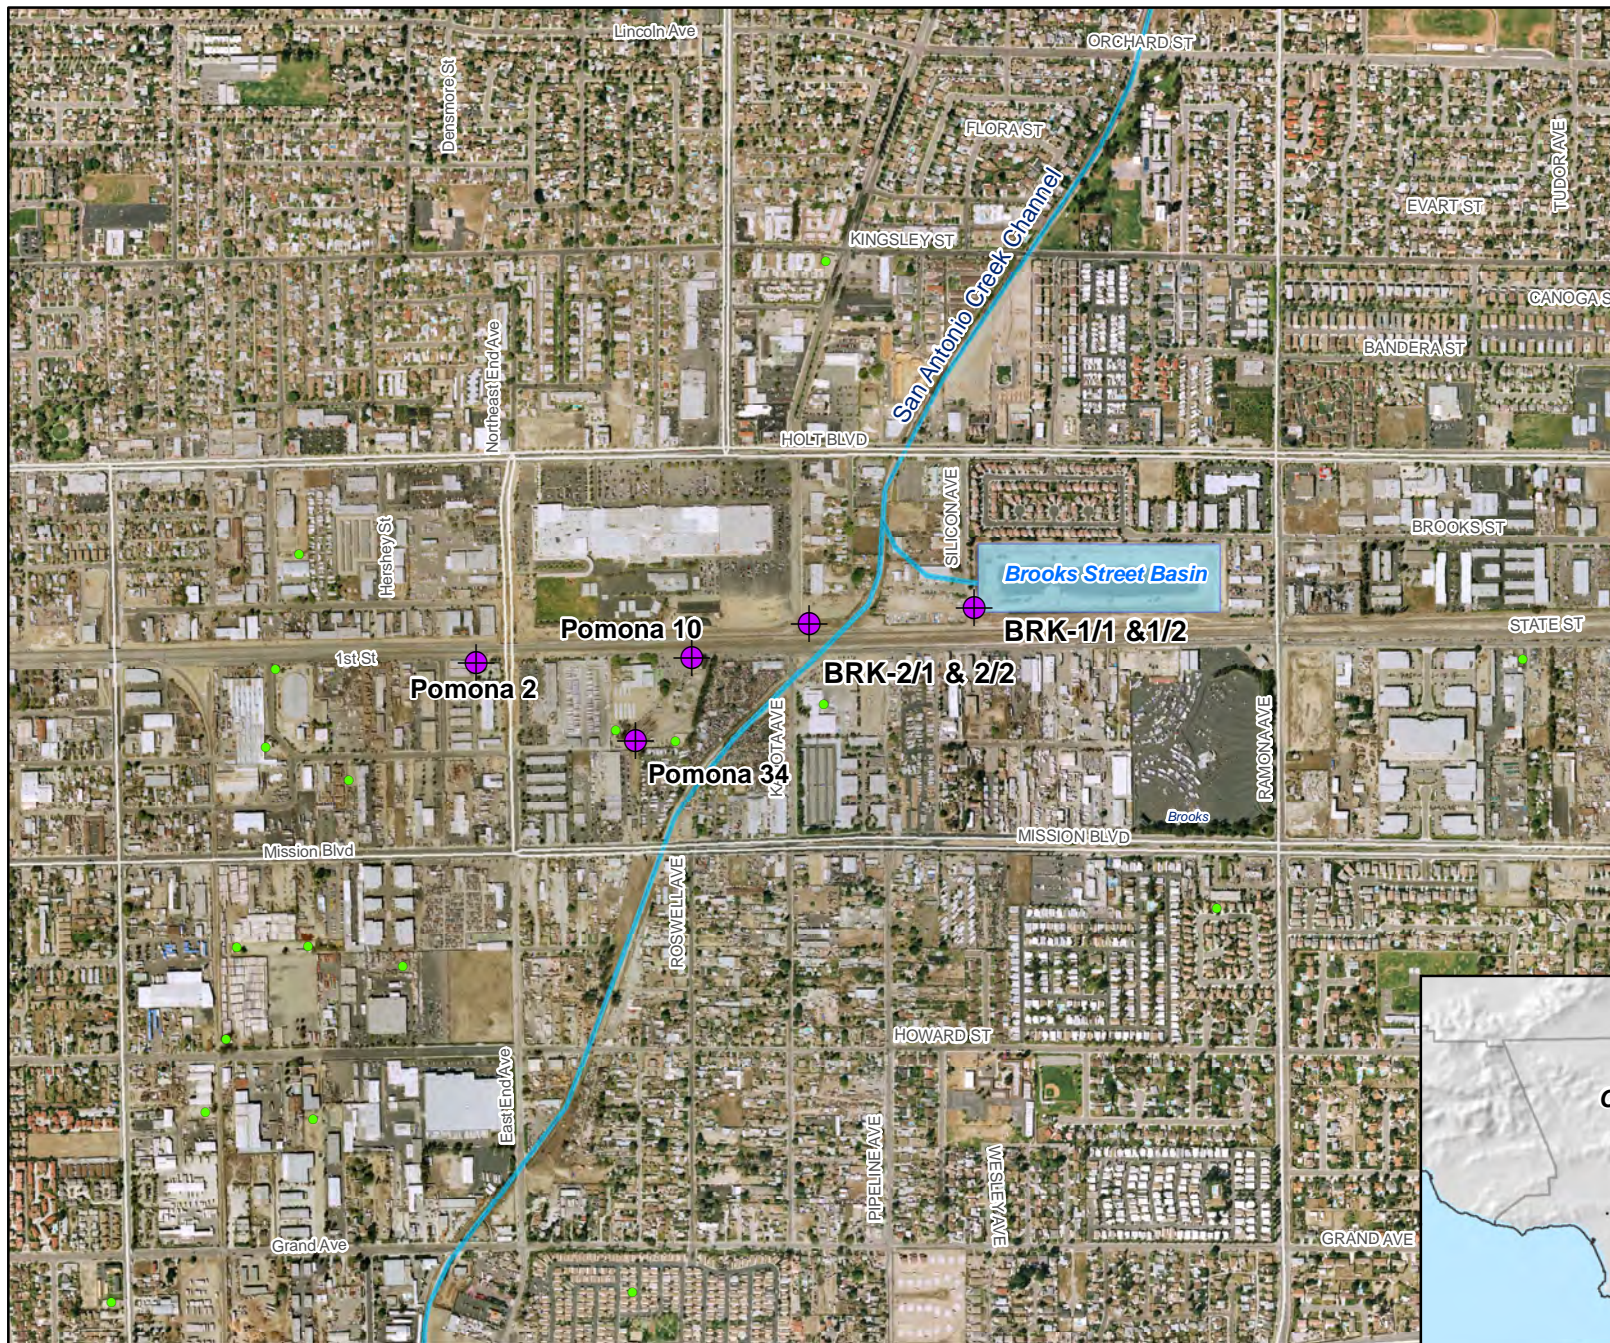





### Main Map Features

-  Existing Monitoring Well
-  "Other" Wells
-  Rivers/Streams/Creeks
-  Recharge Basins



### Monitoring Well Network


Brooks Street Basin

**Figure 2-5**






Recycled Water Recharge Program

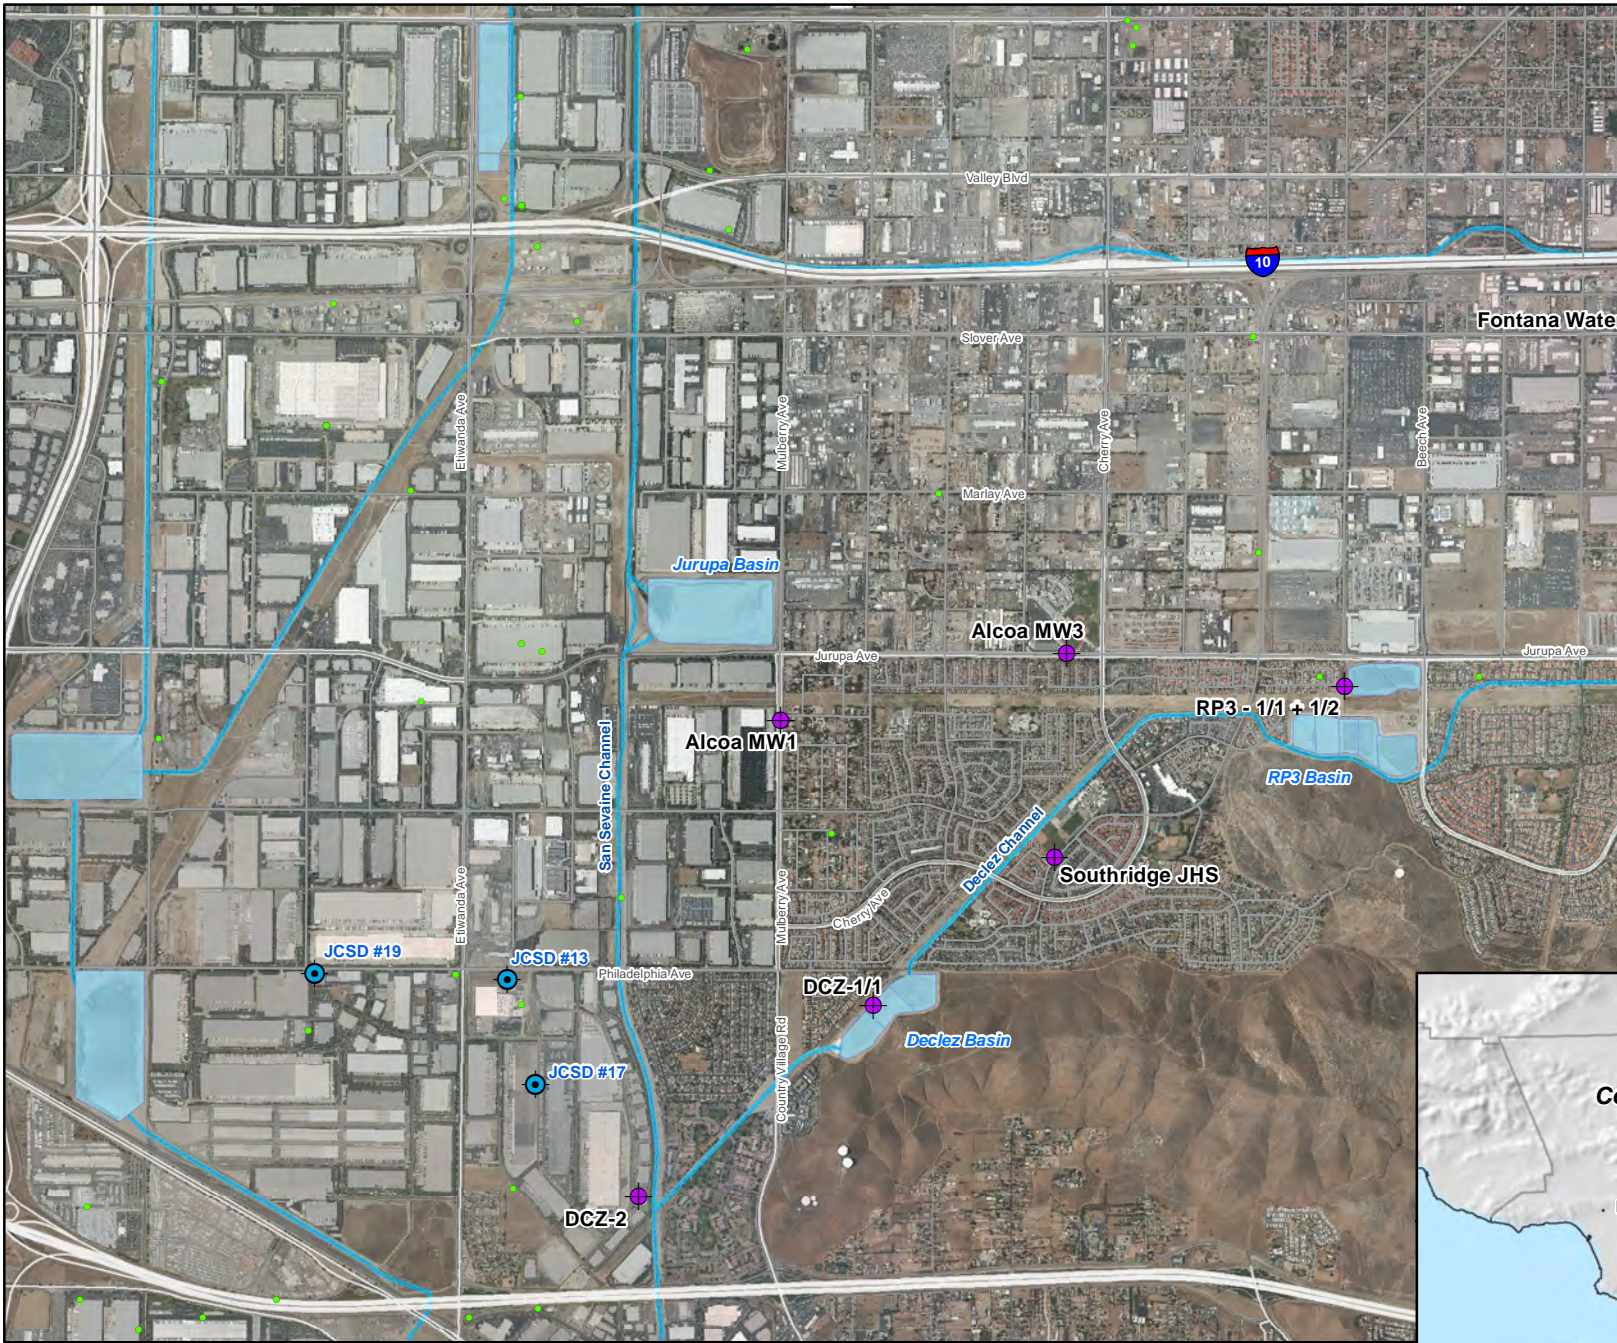





**Main Map Features**


-  JCSD Wells
-  "Other Wells"
-  Existing Monitoring Well
-  Rivers/Streams/Creeks
-  Recharge Basins




**Monitoring Well Network**  
Declez and RP3 Basins

**Figure 2-6**

Recycled Water Recharge Program





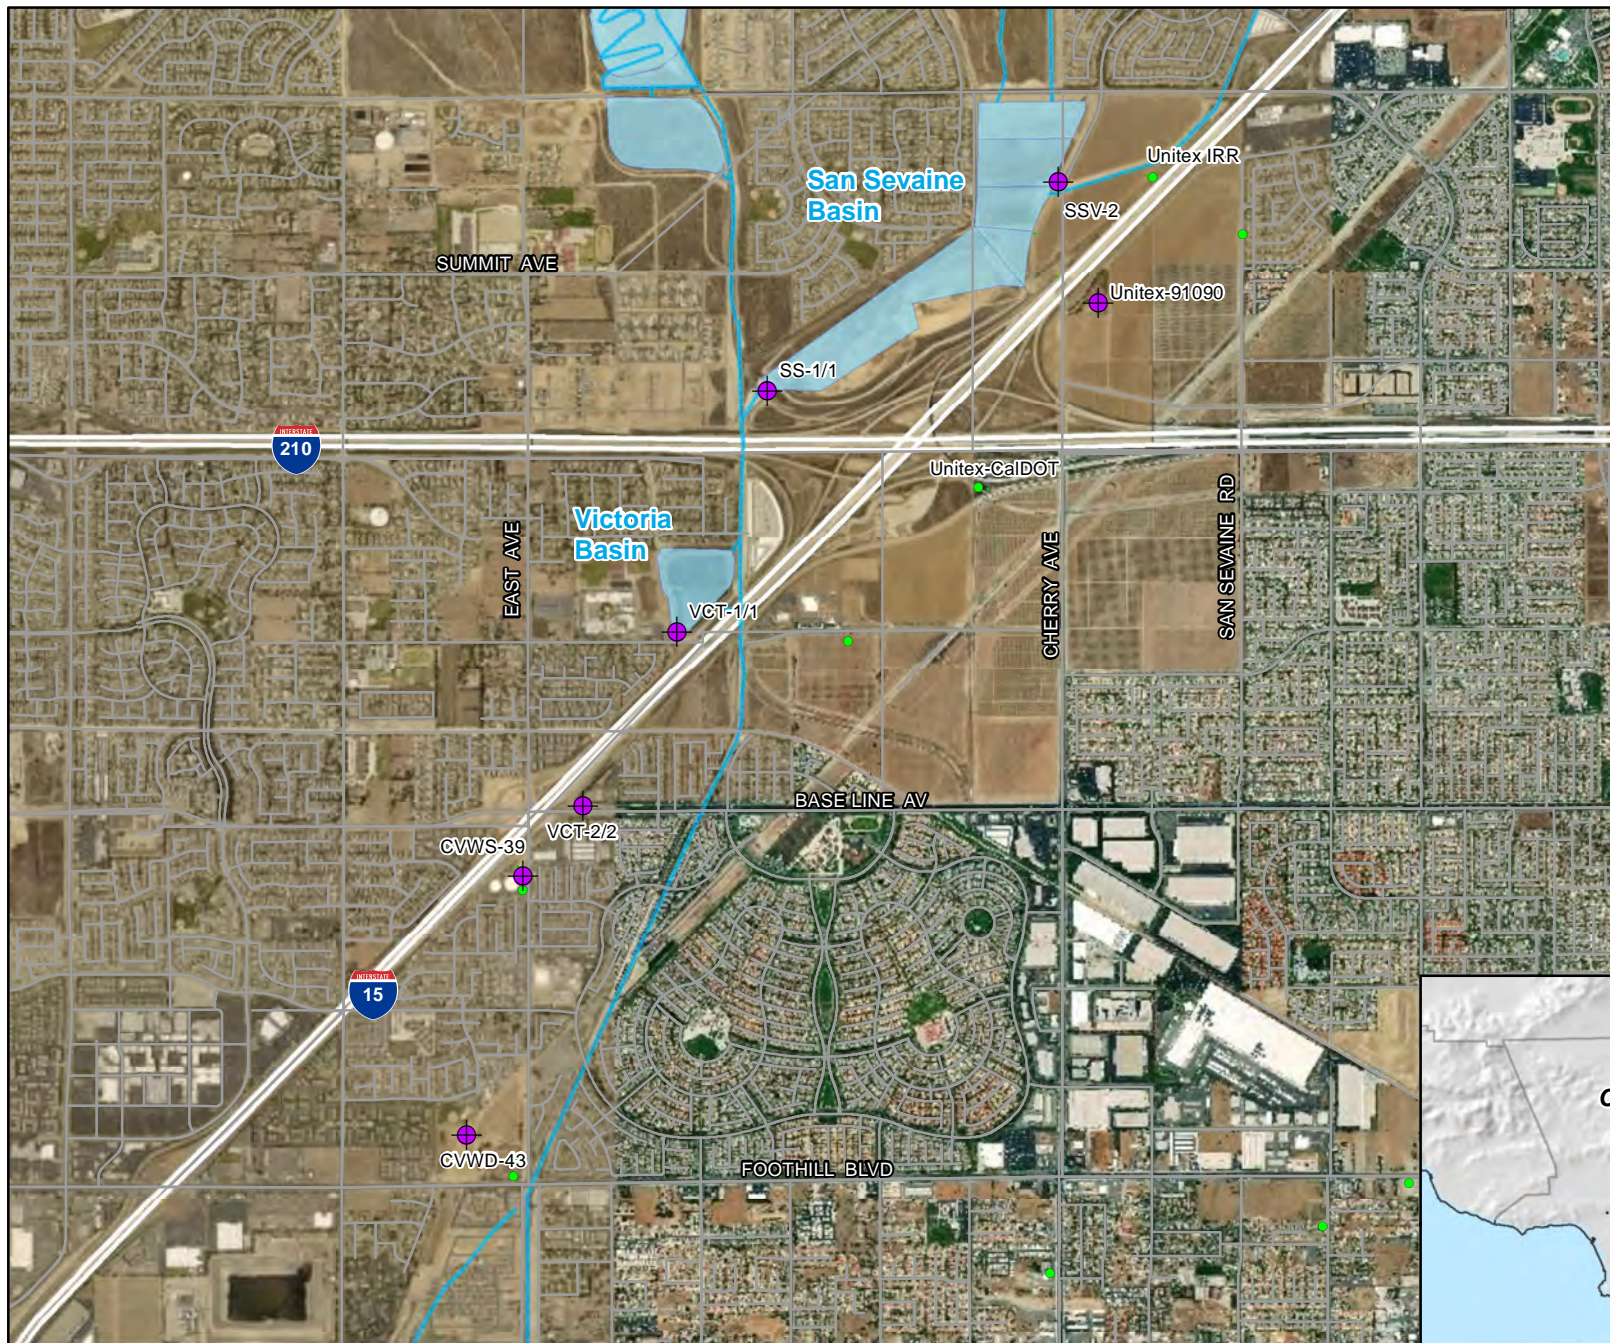

### Main Map Features

- "Other Wells"
- ⊕ Existing Monitoring Well
- Rivers/Streams/Creeks
- Recharge Basins



**Monitoring Well Network**  
San Sevine and Victoria Basin

**Figure 2-7**

Recycled Water Recharge Program

